


# GUARD

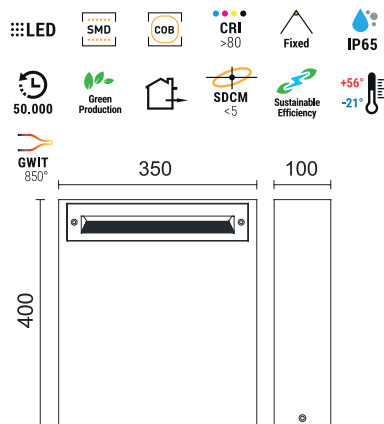

## VOLTAGE

AC180-264V (12W)  
AC220-240V (15W)

## DRIVER OPTIONS

OF On/Off  
DL DALI  
IV 1/10V dimming

## CCT OPTIONS

2700K Warm white  
3000K Warm white  
4000K Neutral white  
5000K Cool white  
6000K Cool white


## OPTIONAL

FINISHING: Black

## BEAM ANGLE



## LIGHT DISTRIBUTION



## COMPLIANCE



## CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



| COD.     | POWER | LUMEN  | B.ANGLE    | SIZE (mm)         |
|----------|-------|--------|------------|-------------------|
| 41329012 | 12W   | 452 lm | Asymmetric | 350 x 100 x 400 h |
| 41330015 | 15W   | 829 lm | Asymmetric | 350 x 150 x 800 h |

**Guard** caratterizzato da un design molto moderno, questo apparecchio è disponibile in due dimensioni, entrambe eleganti e belle. La sua luce pura, uniforme e soffusa migliora ogni ambiente, creando un'atmosfera più confortevole e stilosa. Grazie alla tecnologia LED avanzata, l'apparecchio garantisce una resa luminosa eccellente e un risparmio energetico. Perfetto per l'uso in giardini, parchi, piccole piazze o viali.

**Alloggiamento:** alluminio pressofuso, verniciato a polvere con una scelta di colori RAL, che garantisce sia una finitura elegante che una lunga durata.

**Diffusore:** diffusore in PMMA policarbonato, progettato appositamente per LED, che garantisce una distribuzione uniforme della luce per un'illuminazione morbida e ambientale.

**LED:** riduce il consumo energetico con L80/B10/F10 e vanta una lunga durata di 50.000 ore, funzionando efficacemente in temperature che vanno da -21°C a 56°C.

**Guard** featuring a very modern design, this luminaire is available in two sizes, both exuding elegance and beauty. Its pure, uniform, and soft light output enhances any space, creating a more comfortable and stylish environment. Thanks to advanced LED technology, the luminaire guarantees excellent lumen output and energy efficiency. Perfect for use in gardens, parks, small squares, or walkways.

**Housing:** die-cast aluminum, powder-coated with a choice of RAL colors, ensuring both a sleek finish and durability.

**Diffuser:** PMMA polycarbonate diffuser, specially designed for LED, providing uniform light distribution for a soft and ambient glow.

**LED:** reduces energy consumption with L80/B10/F10 and boasts a long lifespan of 50,000 hours, operating effectively in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at [www.flussirari.it](http://www.flussirari.it). These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

