




HECATE

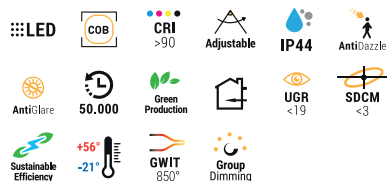

DRIVER OPTIONS	CCT OPTIONS		COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
OF On/Off	2700K	Warm white	41778008	8W	600 lm	17°/24°/38°/60°	Ø47.5 x 90 h
	3000K	Warm white					
	4000K	Neutral white					
	5000K	Cool white					
	6000K	Cool white					
	6500K	Cool white					
OPTIONAL							
FINISHING: White, Black, Brass, Wood							

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	695.5	Ø0.64
2	173.9	Ø1.28
3	77.28	Ø1.93
4	43.47	Ø2.57
5	27.82	Ø3.21

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Hecate è un mini faretto compatto per binario, progettato con un driver integrato per un'installazione facile. Compatibile con la maggior parte dei dimmer a bordo di fase, offre flessibilità nel controllo dell'illuminazione. Disponibile in una varietà di finiture, si adatta perfettamente a diversi ambienti, unendo funzionalità e stile.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con classificazione L80/B10/F10, garantendo una durata di 50.000 ore. Adatto per temperature comprese tra -21°C e 56°C.

UK Hecate is a compact mini mount spot for track, designed with an onboard driver for easy installation. Dimmable with most trailing edge dimmers, it offers flexibility in lighting control. Available in a range of finishes, it seamlessly blends functionality and style for a variety of environments.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with L80/B10/F10 rating, ensuring a 50,000-hour lifespan. Suitable for operating temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

