
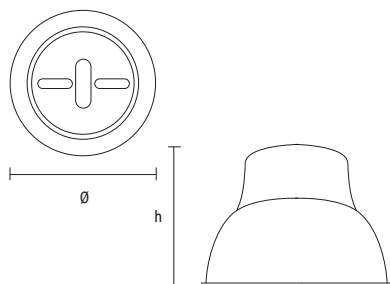


HIGIEN

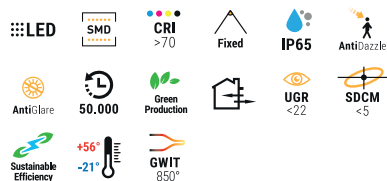

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL


FINISHING: Grey

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
30406100	100W	14500 lm	120°	Ø421 x 385 h
30406120	120W	17400 lm	120°	Ø421 x 385 h
30406150	150W	21750 lm	120°	Ø421 x 385 h
30406180	180W	26100 lm	120°	Ø421 x 385 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Higien è una luce LED high bay ad alta potenza e alta efficienza, progettata per applicazioni commerciali. Garantisce un basso abbagliamento e una resa cromatica precisa, rendendola ideale per ambienti con soffitti alti come centri commerciali, supermercati e piazze. Particolarmente adatta per l'illuminazione delle aree di esposizione alimentare, assicura una qualità ottimale della luce. Il design robusto del faretto garantisce durata e resistenza, mentre la tecnologia LED ad alta efficienza riduce i consumi, offrendo una soluzione di illuminazione durevole.

Alloggiamento: Alluminio pressofuso.

Riflettore: Alluminio anodizzato.

LED: LED ad alta efficienza con prestazioni L80/B10/F10, durata di 50.000 ore e funzionamento affidabile in un intervallo di temperature da -21°C a 56°C.

UK Higien is a high-powered, high-efficiency high bay LED light designed for commercial applications. It provides low glare and accurate color rendering, making it ideal for high-ceiling areas such as shopping malls, supermarkets, and plazas. Particularly suitable for food display areas, it ensures optimal lighting quality. The fixture's robust design ensures durability, and its energy-efficient LED technology reduces consumption while providing a long-lasting lighting solution.

Housing: Die-cast aluminium.

Reflector: Anodized aluminium.

LED: Energy-efficient LED with L80/B10/F10 performance, a 50,000-hour lifespan, and reliable operation within a temperature range of -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

