


INCANTO SCUDO



DRIVER OPTIONS	CCT OPTIONS	COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
OF On/Off	2700K Warm white	41564007	7W	385 lm	Flood	Ø100 x 160 h
PH Phase dimming	3000K Warm white					
DL DALI	4000K Neutral white					
	5000K Cool white					
	6000K Cool white					
	6500K Cool white					
OPTIONAL						
FINISHING: White, Black						

BEAM ANGLE

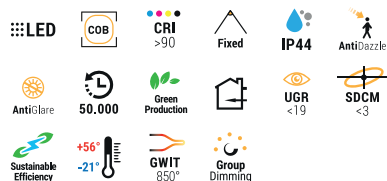

Incanto Scudo è una luce sospesa con un design specificamente progettato per l'illuminazione a sfera da laboratorio, caratterizzata da uno schermo aggiuntivo per lampada e disponibile in opzioni di colore doppio, per soluzioni di illuminazione versatili. La sua ingegneria di precisione lo rende ideale per una varietà di ambienti che richiedono sia funzionalità che un appeal estetico.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con valutazione L80/B10/F10, con una durata di 50.000 ore. Adatto a temperature operative da -21°C a 56°C.

Incanto Scudo is a suspended light with a design specifically tailored for lab ball lighting, featuring an add-on lamp shield and offering dual color options for versatile lighting solutions. Its precision engineering makes it ideal for a variety of environments that require both functionality and aesthetic appeal.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with an L80/B10/F10 rating, offering a lifespan of 50,000 hours. Suitable for operating temperatures ranging from -21°C to 56°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

