


INCANTO TUBE



DRIVER OPTIONS	CCT OPTIONS	COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
OF On/Off	2700K Warm white	41562007	7W	385 lm	Flood	Ø100 x 160 h
PH Phase dimming	3000K Warm white					
DL DALI	4000K Neutral white					
	5000K Cool white					
	6000K Cool white					
	6500K Cool white					
OPTIONAL						
FINISHING: White, Black						

BEAM ANGLE

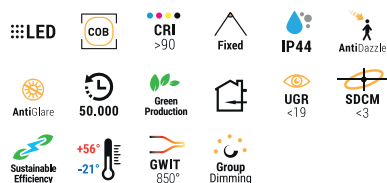

Incanto Tube è una luce sospesa con una forma tubolare elegante, perfetta per ambienti moderni. Con diversi diffusori disponibili su richiesta per un'illuminazione personalizzata, garantendo una distribuzione uniforme della luce e migliorando l'estetica di qualsiasi spazio. Ideale sia per illuminazione funzionale che decorativa, Incanto Tube offre una soluzione elegante per una varietà di ambienti.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con valutazione L80/B10/F10, con una durata di 50.000 ore. Adatto a temperature operative da -21°C a 56°C.

Incanto Tube is a suspended light featuring a sleek tube shape, perfect for modern environments. Shields are available upon request for customizable lighting, ensuring an even light distribution while enhancing the aesthetic of any space. Ideal for both functional and decorative lighting, Incanto Tube offers an elegant solution for a variety of settings.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with an L80/B10/F10 rating, offering a lifespan of 50,000 hours. Suitable for operating temperatures ranging from -21°C to 56°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

