
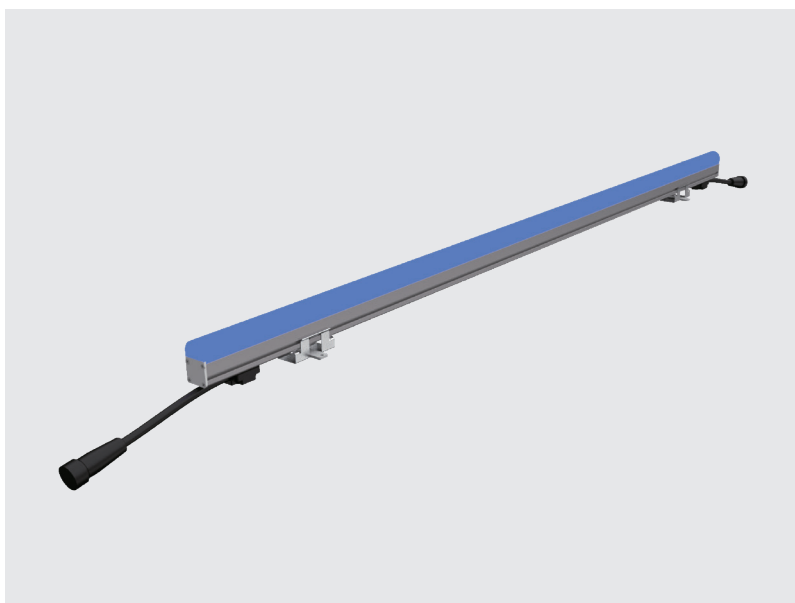


IRIDE



VOLTAGE

DC 24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGB


OPTIONAL

FINISHING: Grey

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



I Irìde è progettato per applicazioni di wallwashing di alta qualità, aggiungendo una perfetta combinazione di stile e tecnologia avanzata a qualsiasi facciata. Il suo alloggiamento in alluminio a profilo basso e le opzioni di montaggio versatili garantiscono un'integrazione discreta in una vasta gamma di dettagli architettonici. Il dispositivo offre una qualità di illuminazione superiore, grazie alla tecnologia all'avanguardia della fonte luminosa LED ad alta efficienza.

Alloggiamento: Alluminio estruso

Diffusore: Vetro temperato trasparente

Riflettore: Lente ottica

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare affidabilmente a temperature comprese tra -21°C e 56°C, garantendo prestazioni durature e risparmi energetici.

The Irìde LED linear floodlight is engineered for high-quality wallwashing applications, adding a perfect blend of style and advanced technology to any facade. Its low-profile aluminum housing and versatile mounting options ensure it can be discreetly integrated into a variety of architectural designs. The fixture provides superior illumination, thanks to the cutting-edge LED technology used in its high-efficiency light source.

Housing: Extruded aluminum

Diffuser: Transparent tempered glass

Reflector: Optical lens

LED: Energy-efficient LED technology (L80/B10/F10), with a 50,000-hour lifespan, designed to operate reliably in temperatures ranging from -21°C to 56°C, ensuring long-term performance and energy savings.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

