


LAMA SPOT

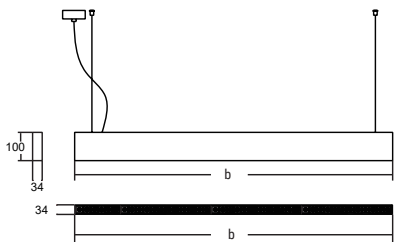

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White
Black
Grey
Yellow
Green
Orange

COD.	POWER	LUMEN	LIGHT	SIZE (mm)
30314030	30	3498	direct	1126x34x100
30314060	60	6360	direct	1126x34x100
30315015	15	1650	direct	1126x34x100
30315030	30	3300	direct	1126x34x100

Italy Lama Spot è una soluzione di illuminazione sospesa antiriflesso, progettata per migliorare le aree di lavoro. Disponibile in una varietà di colori eleganti, si adatta perfettamente agli ambienti moderni. Con il suo design minimalista e le prestazioni di alto livello, è la scelta perfetta per ogni ambiente professionale.

Alloggiamento: Alluminio pressofuso

Diffusore: Faretti

LED: Dotato di tecnologia LED all'avanguardia, riducendo il consumo energetico (L80/B10/F10) con una durata impressionante di 50.000 ore. È progettato per funzionare in modo efficiente in temperature che vanno da -21°C a 56°C.


UK Lama Spot is a suspended anti-glare lighting solution designed to enhance workspaces. Available in a variety of sleek color options, it seamlessly blends into modern environments. With its minimalist design and top-tier performance, it's the perfect choice for any professional setting.

Housing: Die-cast aluminum

Diffuser: Spotlights

LED: Equipped with cutting-edge LED technology, reducing energy consumption (L80/B10/F10) with an impressive 50,000-hour lifespan. It is engineered to perform efficiently in temperatures ranging from -21°C to 56°C.

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

