
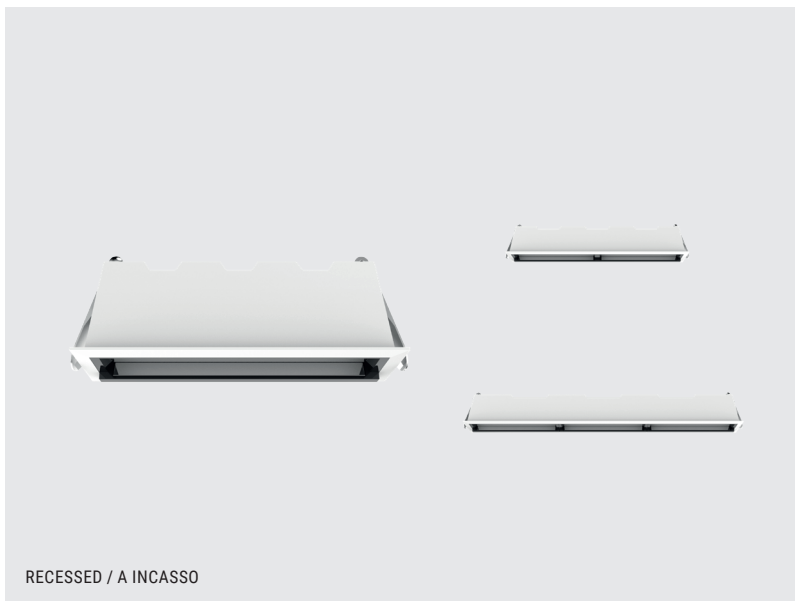



LAMINA

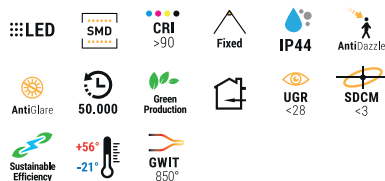

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
PH Phase dimming

CCT OPTIONS

3000K Warm white
4000K Neutral white

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40103010	10W	535 lm	Asymmetric	37 x 139	147 x 45 x 52 h
40103020	20W	1070 lm	Asymmetric	37 x 272	279 x 45 x 52 h
40103030	30W	1605 lm	Asymmetric	37 x 403	411 x 45 x 52 h


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Lamina is a range of architectural linear recessed spotlights, offering both direct and wall washer lighting options. The main body features a radiant surface made of die-cast aluminum, and the patent design optical system is crafted from metallized thermoplastic material. The anti-glare louvre is specially designed to restrict visibility into the luminaire, ensuring efficient visual comfort with a low UGR. Its simple design allows for tool-free installation, making it both practical and elegant.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

Diffuser: PMMA Lens

LED: Reduces energy consumption with L80/B10/F10, providing a 50,000-hour lifespan and reliable performance in temperatures ranging from -20°C to 50°C.

UK Lamina è una gamma di faretti lineari a incasso architettonici, con opzioni di illuminazione diretta e wall washer. Il corpo principale presenta una superficie radiante in alluminio pressofuso, mentre il sistema ottico dal design brevettato è realizzato in materiale termoplastico metallizzato. Il louvre anti-abbagliamento è progettato per limitare la vista nel corpo del faretto, garantendo un comfort visivo efficiente con un basso UGR. Il design semplice consente un'installazione senza strumenti, rendendolo pratico ed elegante.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

Diffusore: Lente in PMMA

LED: Riduce il consumo energetico con L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -20°C a 50°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

