



LETO

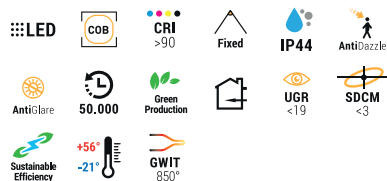

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
41785035	35 W	1400 lm	Flood	Ø600 x 50 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	624.7	Ø3.10
2	156.2	Ø6.21
3	69.41	Ø9.31
4	39.04	Ø12.42
5	24.99	Ø15.52

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Leto è un pannello ultra-sottile progettato per l'illuminazione su binario magnetico, con una costruzione senza viti, offrendo una soluzione moderna e minimalista per ogni ambiente. Questo pannello garantisce prestazioni eccellenti mantenendo un'estetica pulita, ideale sia per ambienti residenziali che commerciali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con una valutazione L80/B10/F10, garantendo una durata di 50.000 ore, progettato per operare in modo efficiente a temperature comprese tra -21°C e 56°C.

Leto is a sleek, ultra-flat panel designed for magnetic track lighting with a screwless construction, offering a modern and minimalist solution for any space. This panel provides excellent performance while maintaining a clean aesthetic, ideal for both residential and commercial settings.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with an L80/B10/F10 rating, ensuring a 50,000-hour lifespan, and designed to perform efficiently in temperatures ranging from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

