
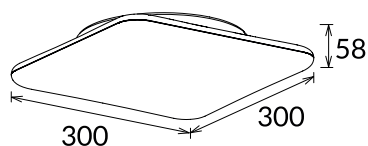


LIRA QUADRO

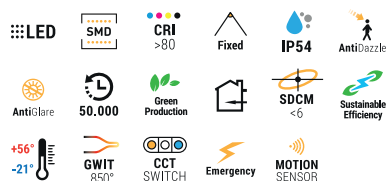

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
TR Triac

CCT OPTIONS

CCT CCT Changeable

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40232018	18W	1920 lm	120°	300 x 300 x 58 h
40232025	25W	2670 lm	120°	300 x 300 x 58 h
40232030	30W	2610 lm	120°	400 x 400 x 58 h

OPTIONAL


FINISHING: White

FUNCTION: 3h Integrated emergency module

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Lira Quadro è una lampada da parete o da superficie dal design quadrato ed elegante. Dotata di un LED ad alta efficienza, fornisce un'illuminazione diretta, pura e omogenea. Il diffusore riduce efficacemente l'abbagliamento, garantendo una luce confortevole e non invasiva per l'occhio umano. Perfetta per l'illuminazione ambientale, offre una luce morbida e pura. Inoltre, sulla parte posteriore è presente un interruttore CCT che consente di scegliere la temperatura di colore desiderata (3000K, 4000K o 5700K).

Alloggiamento: Polycarbonato

Diffusore: Polycarbonato

LED: Tecnologia LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili e durature.

UK Lira Quadro is a square surface or wall-mounted lamp with a sleek design. Equipped with a high-efficiency LED, it provides direct, pure, and uniform lighting. The diffuser effectively reduces glare, ensuring the light is comfortable and non-intrusive to the human eye. Ideal for ambient lighting, it offers a soft, pure light. Additionally, a CCT switch on the back allows you to select the desired color temperature (3000K, 4000K, or 5700K).

Housing: Polycarbonate

Diffuser: Polycarbonate

LED: Energy-efficient LED technology with an L80/B10/F10 rating, offering a 50,000-hour lifespan. Operates within a temperature range of -21°C to 56°C, ensuring reliable and long-term performance.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

