



LUCIDO

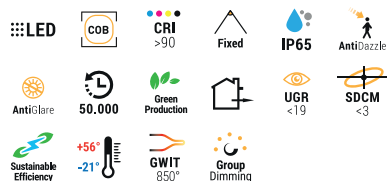

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
PH Phase dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
40239007	7W	400 lm	Flood	Ø85 x 113 x 140 h

BEAM ANGLE



Lucido è una lampada versatile da soffitto o da parete, progettata per offrire una luce morbida e diffusa grazie al suo schermo in vetro opalino. L'alloggiamento in alluminio pressofuso garantisce sia durabilità che un aspetto elegante e moderno, rendendola ideale per vari ambienti. Il suo design pulito e la tecnologia LED a basso consumo uniscono stile e prestazioni per un'illuminazione duratura.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili nel tempo.

Lucido is a versatile ceiling or wall-mounted lamp, designed to provide a soft, diffuse glow through its opal glass shield. The die-cast aluminum housing ensures both durability and a sleek, modern appearance, making it a perfect fit for various settings. Its clean design and energy-efficient LED technology combine style and performance for long-lasting illumination.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED technology with an L80/B10/F10 rating, offering a 50,000-hour lifespan. Operates in temperatures ranging from -21°C to 56°C, ensuring reliable performance over time.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

