
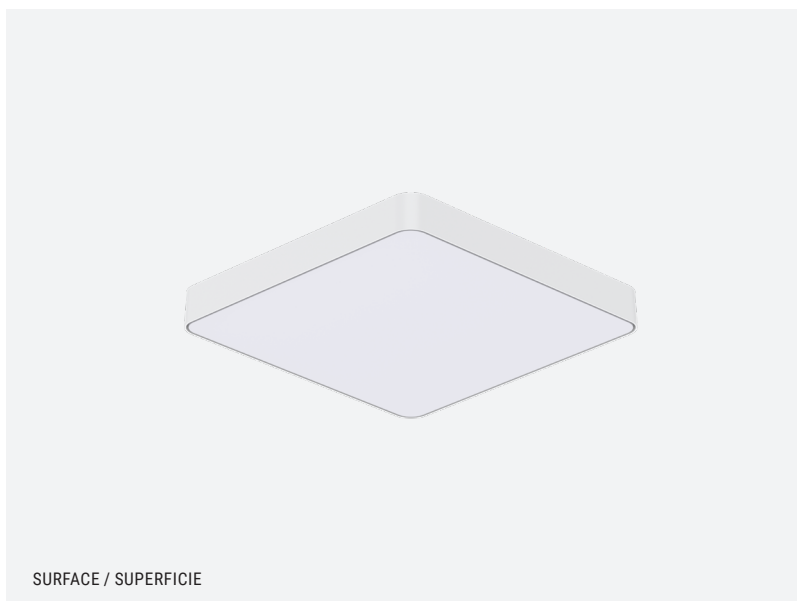
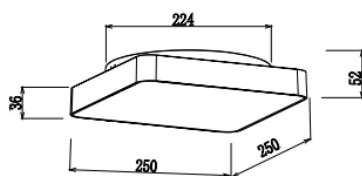


LUME QUADRO

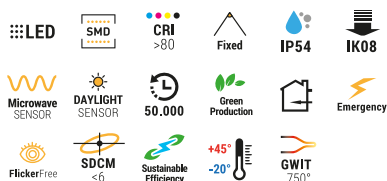

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
DL DALI
TR Triac

CCT OPTIONS

3000K Warm white
4000K Neutral white
5000K Cool white
5700K Cool white

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
40259015	10W/15W	1154-1827 lm	120°	250 x 250 x 52 h


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



■ Lume Quadro è una plafoniera dal design ultra-sottile con una cornice che presenta una forma quadrata e minimalista, incarnando armonia e texture. Con un'emissione di luce quasi senza bordi, offre un'illuminazione uniforme e morbida, creando un'esperienza calda e confortevole per l'utente finale. Il suo principale punto di forza è il design modulare multifunzionale, che consente una personalizzazione fai-da-te di diverse funzioni.

Alloggiamento: Policarbonato

Riflettore: Policarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -20°C a 45°C

■ Lume Quadro is an ultra-thin frame design ceiling light, featuring a square and minimalist design that embodies harmony and texture. With comprehensive and nearly borderless light emission, it provides uniform and soft lighting, creating a warm and comfortable experience for end user. The most powerful advantage is its multifunctional modular design, allowing for DIY customization of different functions.

Housing: Polycarbonate

Diffuser: Polycarbonate

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-20°C to 45°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

