
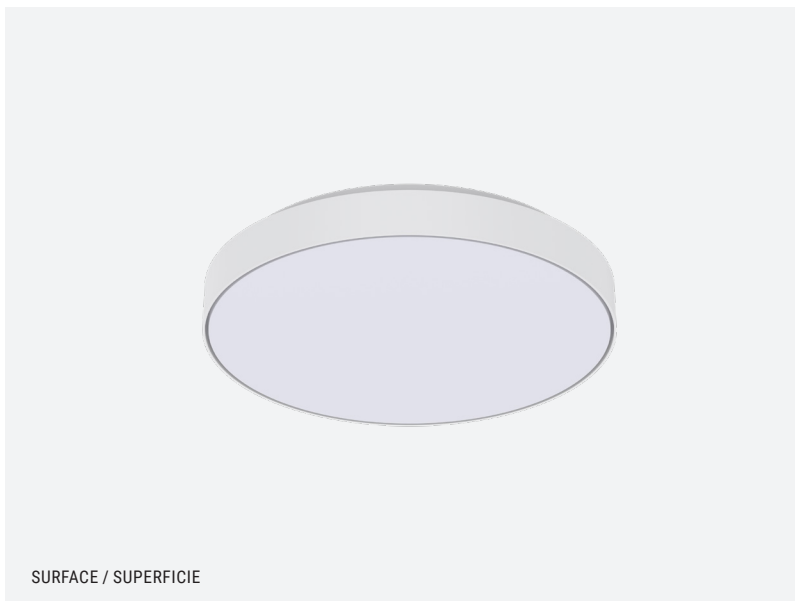



LUME

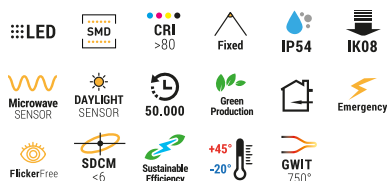

SURFACE / SUPERFICIE

DRIVER OPTIONS

OF On/Off
DL DALI
TR Triac

CCT OPTIONS

3000K Warm white
4000K Neutral white

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
40249015	10W/15W	1000-1550 lm	120°	Ø250 x 53 h
40249025	12W/18W/25W	1350-2650 lm	120°	Ø250 x 53 h


OPTIONAL

FINISHING: White

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Lume è una plafoniera con design ultra-sottile, modulare ed ad alta efficienza; la struttura della luce è divisa in due parti: la parte anteriore, che ospita il chip LED ad alta lumen, permette alla plafoniera di emettere una luce uniforme e morbida, offrendo agli utenti una buona esperienza visiva; la parte posteriore è quella del driver, con design modulare, che può essere smontato e sostituito manualmente senza l'uso di attrezzi, rendendo la manutenzione e gli aggiornamenti più facili.

Alloggiamento: Polycarbonato

Riflettore: Polycarbonato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -20°C a 45°C

UK Lume is an ultra-thin trim design, modular design and high-efficiency design ceiling light; the luminaire structure is divided into two parts: the front light source part adopts high lumen LED chip to make the luminaire emit light evenly and softly, providing users with a good visual experience; the rear part is the driver part with the modular design, can be disassembled and replaced by hand without tools, convenient for maintenance and updates.

Housing: Polycarbonate

Diffuser: Polycarbonate

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-20°C to 45°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

