



LUMEA WS

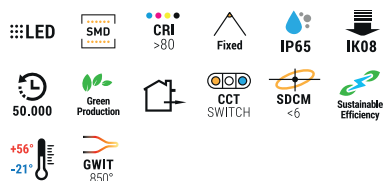

DRIVER OPTIONS

OF On/Off
TR Triac


CCT OPTIONS

CCT CCT Changeable


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



41264008

41265008

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41264008	8W	700 lm	320°	100 x 142 x 230 h
41265008	8W	600 lm	360°	100 x 142 x 230 h

🇮🇹 Lumea WS è progettato per pareti esterne, offrendo opzioni di illuminazione versatili con una copertura Milky PC o un riflettore con copertura trasparente. Inoltre, è dotato di un interruttore CCT, che consente di regolare facilmente la temperatura del colore per adattarsi a diversi ambienti e umori. Perfetto per valorizzare gli spazi esterni, questa luce unisce funzionalità e design elegante.

Alloggiamento: Alluminio pressofuso

Riflettore: PC + alluminio

Diffusore: Polycarbonato

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare efficacemente in temperature da -21°C a 56°C.

🇬🇧 The Lumea WS is designed for outdoor walls, offering versatile lighting options with either a Milky PC cover or a Reflector with a transparent cover. Additionally, it features a CCT switch, allowing you to easily adjust the color temperature to suit different environments and moods. Perfect for enhancing exterior spaces, this light combines functionality with stylish design.

Housing: Die-cast aluminum for a strong and durable construction, ensuring long-lasting performance.

Reflector: PC + aluminum

Diffuser: Polycarbonate

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), with a 50,000-hour lifespan, designed to operate effectively in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

