



LUMOD WS

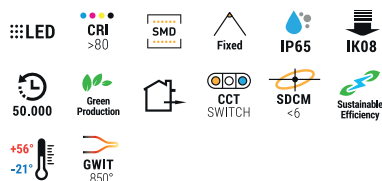

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

3000K Warm white
4000K Neutral white
5000K Cold white
5700K Cold white

COD.

41266010

POWER

10W

LUMEN

530 lm

B.ANGLE

50°

SIZE (mm)

240 x 81 x 78 h


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Lumod WS è progettato per pareti esterne, ideale per creare effetti decorativi grazie alla sua forma unica e moderna. Il suo design innovativo consente di disporre più unità insieme per creare sorprendenti motivi. Questa flessibilità lo rende perfetto per aggiungere sia funzionalità che appeal artistico a qualsiasi spazio esterno.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Diffusore: polycarbonato

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare efficacemente in temperature da -21°C a 56°C.

UK The Lumod WS is designed for outdoor walls, ideal for creating decorative lighting features with its unique and modern form. Its innovative design allows you to arrange multiple units together to create stunning patterns. This flexibility makes it perfect for adding both functionality and artistic appeal to any outdoor space.

Housing: Die-cast aluminum powder-coated

Diffuser: Polycarbonate

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), with a 50,000-hour lifespan, designed to operate effectively in temperatures ranging from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

