


MARS

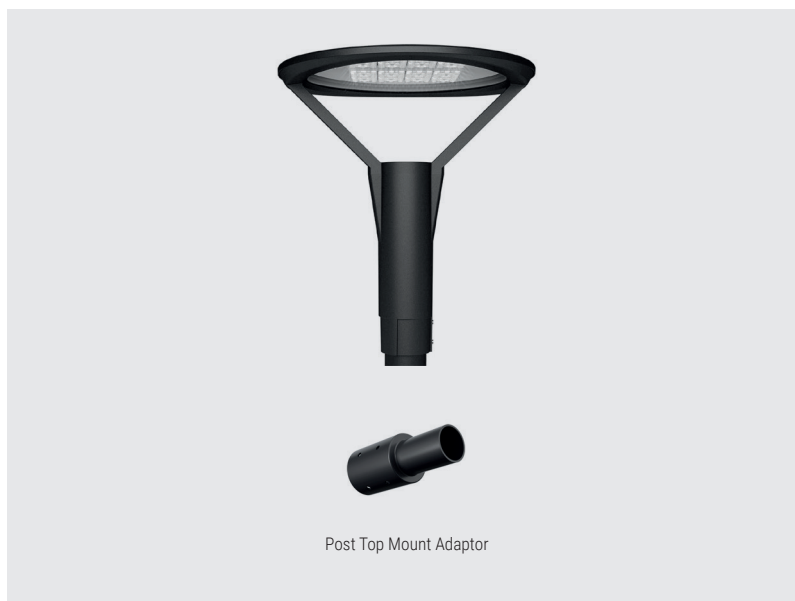

VOLTAGE


AC220-240V

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
IV 1/10V dimming	4000K Neutral white
	5000K Cool white
	6000K Cool white
	6500K Cool white
OPTIONAL	

FINISHING: Black

ACCESSORIES: Post Top Mount Adaptor

BEAM ANGLE



COD.	POWER	LUMEN	B.ANGLE
40416040	40W	4800 lm	137x30°/148x38°/151x120° 152x108°/154x40°/155°/158°
40416060	60W	7200 lm	137x30°/148x38°/151x120° 152x108°/154x40°/155°/158°
40416075	75W	9000 lm	137x30°/148x38°/151x120° 152x108°/154x40°/155°/158°
40416100	100W	12000 lm	137x30°/148x38°/151x120° 152x108°/154x40°/155°/158°

Il MARS LED Post Top è il culmine di precisione e funzionalità, progettato per elevare l'estetica degli spazi esterni. Con il suo design elegante e ottiche avanzate, questo apparecchio garantisce una visibilità ottimale, integrandosi perfettamente in vari ambienti.

Il MARS LED Post Top vanta un design moderno e elegante, rendendolo una stylish aggiunta a qualsiasi ambiente esterno.

Dotato di ottiche avanzate, fornisce illuminazione precisa e uniforme, migliorando la visibilità e riducendo al minimo il riverbero.

Realizzato con materiali di alta qualità, il luminaire assicura durata nel tempo e resistenza agli agenti atmosferici.

MARS offre un'illuminazione efficiente con opzioni di potenza multiple, adattandosi a diverse esigenze di illuminazione.

Adatto a una gamma di applicazioni, dai parchi e marciapiedi alle aree residenziali e spazi pubblici.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

LED: efficienza energetica con elevate valutazioni L80/B10/F10 e una durata estesa di 50.000 ore. Temperatura di funzionamento: -22°C a 66°C.

The MARS LED Post Top is a pinnacle of precision and functionality, designed to elevate the aesthetics of outdoor spaces. With its sleek design and advanced optics, this luminaire ensures optimal visibility while seamlessly integrating into various environments.

The MARS LED Post Top boasts a modern and sleek design, making it a stylish addition to any outdoor setting.

Equipped with advanced optics, it provides precise and uniform lighting, enhancing visibility and minimizing glare.

Crafted with high-quality materials, the luminaire ensures durability and longevity, withstanding outdoor elements.

MARS offers efficient illumination with multiple wattage options, catering to diverse lighting requirements.

Suitable for a range of applications, from parks and walkways to residential areas and public spaces.

Housing: die-cast aluminum

Reflector: anodized aluminum

LED: energy efficiency with high L80/B10/F10 ratings and an extended lifetime of 50,000 hours. Operating temperature: -22°C to 66°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

