
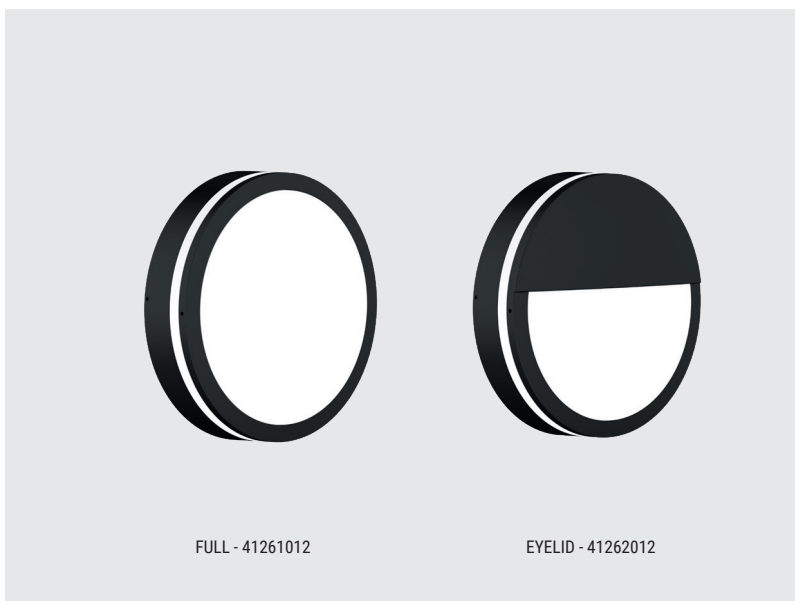



MASEA WS2

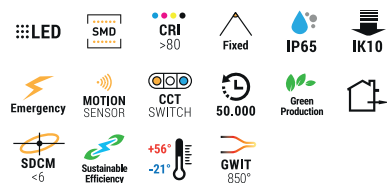

FULL - 41261012

EYELID - 41262012

DRIVER OPTIONS

OF On/Off
TR Triac
DL Dali
IV 1/10V dimming

CCT OPTIONS

CCT CCT Changeable
 3000K/ 4000K/
 5700K

OPTIONAL


FINISHING: White RAL9016
 Black RAL9005

FUNCTION: Motion sensor
 3h Integrated emergency module
 Adjustable power

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	TYPE	POWER	LUMEN	B.ANGLE	SIZE (mm)
41261012	FULL	12W	1030 lm	120°	Ø251 x 75 h
41261018	FULL	18W	1530 lm	120°	Ø251 x 75 h
41262012	EYELID	12W	720 lm	120°	Ø251 x 76 h
41262018	EYELID	18W	970 lm	120°	Ø251 x 76 h

Italy: Masea WS2 è una luce da superficie per pareti, progettata per le pareti esterne, che offre un mix di funzionalità e stile. Disponibile nelle versioni full o con eyelid, offre versatilità per adattarsi a diverse preferenze di design. Può essere anche equipaggiata con funzionalità speciali, tra cui un sensore di movimento, un modulo di emergenza integrato da 3 ore e un interruttore CCT, aumentando ulteriormente la sua praticità. Le opzioni di potenza sono selezionabili tra 10W e 12W o tra 10W e 18W, offrendo la possibilità di regolare l'intensità della luce.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Diffusore: policarbonato

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare efficacemente in temperature da -21°C a 56°C.

UK: Masea WS2 is a wall surface light designed for outdoor walls, offering a blend of functionality and style. Available in both full and eyelid versions, it provides versatility to complement various design preferences. It can also be equipped with special features, including a motion sensor, integrated 3-hour emergency module, and a CCT switch, further enhancing its practicality. The power output can be selected from options ranging from 10W to 12W and 10W to 18W, providing flexibility to adjust the lighting intensity.

Housing: Die-cast aluminum powder-coated

Diffuser: Polycarbonate

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), with a 50,000-hour lifespan, designed to operate effectively in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

