



MASEA WS3

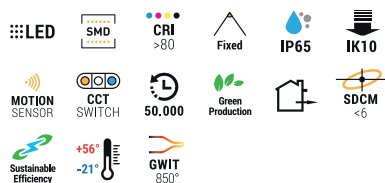

DRIVER OPTIONS

OF On/Off
TR Triac
DL Dali
IV 1/10V dimming

CCT OPTIONS

CCT CCT Changeable
 3000K/ 4000K/
 5700K

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41263015	15W	1500 lm	110°	Ø251 x 116 h

OPTIONAL


FINISHING: White RAL9016
 Black RAL9005

FUNCTION: Motion sensor
 Adjustable power

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Masea WS3, con la sua struttura affascinante, è la scelta ideale per valorizzare le pareti esterne. Il suo design moderno garantisce sia funzionalità che appeal estetico, ed è possibile equipaggiarlo con l'interruttore CCT per una temperatura di colore regolabile o con un sensore di movimento per una maggiore comodità ed efficienza energetica. Con opzione di potenza che va da 10W a 15W, è possibile regolare facilmente l'intensità della luce in base alle proprie esigenze.

Alloggiamento: Alluminio pressofuso verniciato a polvere

Diffusore: policarbonato

LED: Tecnologia LED avanzata che riduce il consumo energetico (L80/B10/F10), con una durata di 50.000 ore, progettato per funzionare in temperature da -21°C a 56°C.

UK Masea WS3, with its captivating structure, is the perfect choice for enhancing outdoor walls. Its modern design ensures both functionality and aesthetic appeal, and it can be equipped with a CCT switch for adjustable color temperatures or a motion sensor for added convenience and energy efficiency. With power option ranging from 10W to 15W, the light output can be easily tailored to suit specific needs.

Housing: Die-cast aluminum powder-coated

Diffuser: Polycarbonate

LED: Advanced LED technology reduces energy consumption (L80/B10/F10), offering a 50,000-hour lifespan, designed to perform in temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

