


MATINI

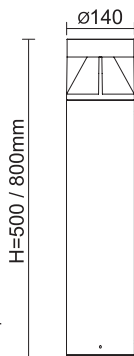

VOLTAGE


AC100-240V (12W)
AC220-240V (26W)

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white

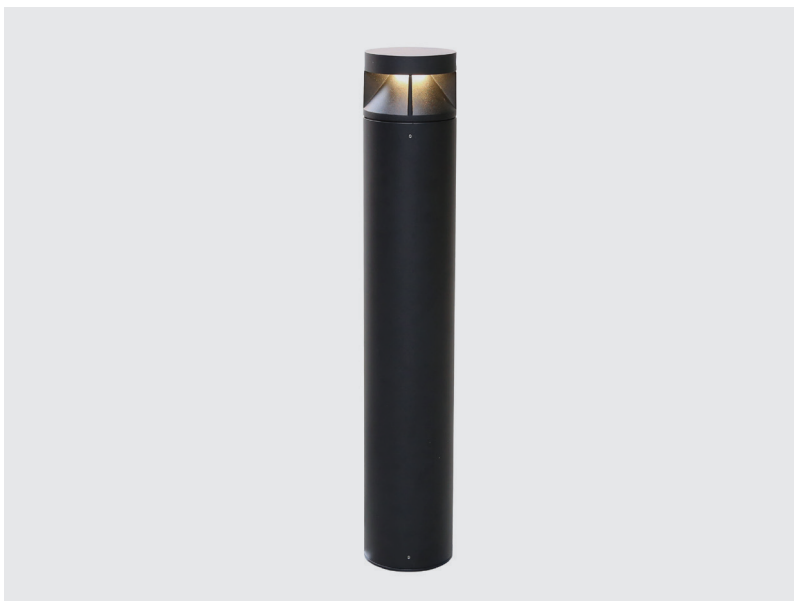

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41305012	12W	242 lm	Asymmetric	Ø140 × 500/800 h
41307026	26W	1143 lm	Asymmetric	Ø200 × 500/800 h


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Matini presenta un design semplice ed elegante, che unisce bellezza e funzionalità. La sorgente luminosa è un chip LED ad alta efficienza in entrambe le opzioni, che garantisce un ottimo flusso luminoso e una luce piacevole, uniforme e confortevole. Ideale per piccole strade, piazze, giardini e parchi, disponibile in diverse altezze.

Alloggiamento: alluminio pressofuso, verniciato a polvere con una selezione di colori RAL per garantire resistenza e una finitura raffinata.

Diffusore: diffusore in PMMA policarbonato, progettato appositamente per LED, che assicura una distribuzione uniforme della luce.

LED: tecnologia LED ad alta efficienza, che riduce il consumo energetico (L80/B10/F10) e vanta una durata di 50.000 ore, con prestazioni affidabili a temperature comprese tra -21°C e 56°C.

Matini features a simple and classy design, combining elegance and functionality. The light source is a high-efficiency LED chip in both options, providing excellent luminous flux and delivering a pleasant, uniform, and comfortable light beam. This makes it ideal for small streets, squares, gardens, and parks. Available in various heights to suit different applications.

Housing: die-cast aluminum, powder-coated with a selection of RAL colors for durability and a refined finish.

Diffuser: PMMA polycarbonate diffuser, specially designed for LED, ensuring uniform light distribution.

LED: energy-efficient LED technology, reducing consumption (L80/B10/F10) with a 50,000-hour lifespan, operating in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.



Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.