
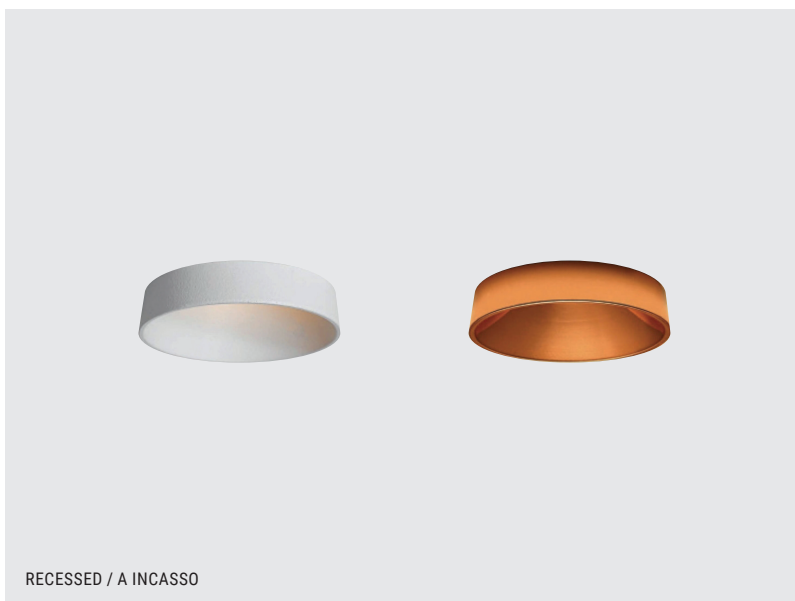



MINI DORATO R

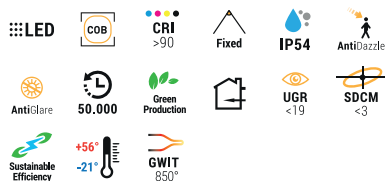

RECESSED / A INCASSO

DRIVER OPTIONS

OF On/Off

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black, Rose Gold

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
42918006	6W	700 lm	15°/24°/36°	Ø38	Ø45 x 75 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	1985	Ø0.35
2	496.3	Ø0.70
3	220.6	Ø1.06
4	124.1	Ø1.41
5	79.41	Ø1.77

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Mini Dorato R è una luce a soffitto con un design compatto e incassato, disponibile in vari finiture come Bianco, Nero e l'elegante Oro Rosa. La finitura Oro Rosa aggiunge un tocco sofisticato, caldo e moderno a qualsiasi ambiente, rendendolo perfetto per interni contemporanei che richiedono un po' di lusso. Che si tratti di un ambiente residenziale o commerciale, Mini Dorato arricchisce l'estetica della stanza, offrendo al contempo un'illuminazione efficiente.

Alloggiamento: Alluminio pressofuso, che offre resistenza e un aspetto elegante e moderno.

Riflettore: Alluminio anodizzato, progettato per migliorare la riflessione della luce e l'efficienza complessiva.

LED: LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili nel tempo.

Mini Dorato R is a ceiling surface light with a compact and recessed design, offering versatile style options with finishes like White, Black, and the elegant Rose Gold. The Rose Gold finish brings a sophisticated, warm, and modern touch to any space, making it perfect for contemporary interiors that require a bit of luxury. Whether used in residential or commercial settings, Mini Dorato elevates the room's aesthetic while offering efficient illumination.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED with an L80/B10/F10 rating, offering a lifespan of 50,000 hours. Operates within a temperature range of -21°C to 56°C, ensuring reliable performance for years to come.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

