



MINI

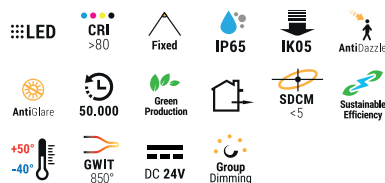

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white
RGBW

OPTIONAL

FINISHING: Black, White, Silver

BEAM ANGLE



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40999001	1W	357 lm	90°	Ø21	Ø24 x 22 h
40999002	2W	80 lm	45°/90°	Ø26.5	Ø34 x 30 h

Il Mini LED Handrail Light introduce una discreta illuminazione verso il basso, elevando sia l'estetica che la visibilità per un'esperienza illuminotecnica senza soluzione di continuità e visivamente piacevole.

Questo apparecchio fornisce un flusso continuo di luce, garantendo non solo sicurezza ma contribuendo anche alla consapevolezza ambientale attraverso un'illuminazione altamente efficace ed efficiente dal punto di vista energetico.

Che si tratti di illuminare scale in spazi pubblici o di delimitare ringhiere e percorsi, il design fai-da-te del Mini LED Handrail Light si integra senza soluzione di continuità con vari elementi architettonici, offrendo flessibilità di applicazione.

Il Mini LED Handrail Light offre due tipi di distribuzione della luce—simmetrica e asimmetrica—garantendo adattabilità a diverse esigenze ambientali.

Quando distribuito uniformemente lungo un corridoio, questo apparecchio minimizza il riverbero mantenendo un'alta uniformità, creando un'atmosfera visivamente piacevole e sicura.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperatura di lavoro da -40°C a 50°C

The Mini LED Handrail Light introduces discreet downlighting, elevating both aesthetics and visibility for a seamless and visually pleasing lighting experience.

This luminaire provides a continuous flow of light, not only ensuring safety but also contributing to environmental consciousness by delivering highly effective and energy-efficient illumination.

Whether illuminating stairs in public spaces or lining railings and paths, the Mini LED Handrail Light's DIY design seamlessly integrates with various architectural elements, offering flexibility in application.

The Mini LED Handrail Light offers two types of light distribution—symmetrical and asymmetrical—ensuring adaptability to different environmental requirements.

When evenly distributed along a corridor, this luminaire minimizes glare while maintaining high uniformity, creating a visually pleasing and safe atmosphere.

Housing: die-cast aluminum

Reflector: anodized aluminum

LED: reduces energy consumption L80/B10/F10 - 50.000 hrs lifetime - working temp -40°C to 50°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

