



MONARCA R

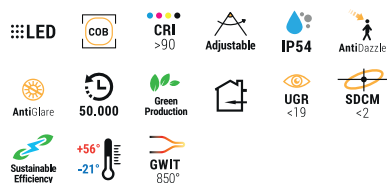

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white


OPTIONAL

FINISHING: White, Black

ACCESSORIES: Adaptor ring

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
42926010	10W	700 lm	24°/36°/50°	Ø70	Ø76 x 80 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	3683	Ø0.33
2	920.7	Ø0.67
3	409.2	Ø1.00
4	230.2	Ø1.34
5	147.3	Ø1.67

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Monarca è una luce incassata a soffitto, dotata di un anello per ridurre ulteriormente l'abbagliamento e creare un'illuminazione d'ambiente morbida e diffusa. Il suo design elegante è ideale per arricchire sia ambienti residenziali che commerciali, offrendo una soluzione luminosa raffinata che favorisce il comfort e il relax.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: LED a basso consumo con classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili e durature.

Monarca is a recessed ceiling light that features an adaptor ring, designed to minimize glare and create a soft, diffused ambient illumination. Its sleek design is ideal for enhancing both residential and commercial spaces, offering a refined lighting solution that promotes comfort and relaxation.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption LED with an L80/B10/F10 rating, providing a 50,000-hour lifespan. Operates within a temperature range of -21°C to 56°C, ensuring reliable and long-lasting performance.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

