


NADIR FL2

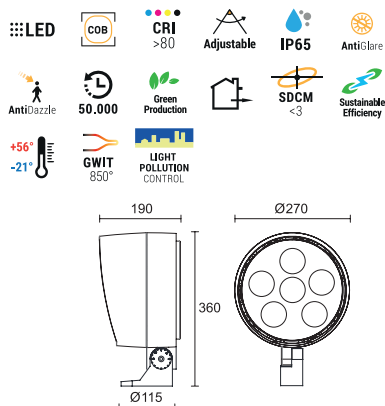

VOLTAGE

AC100-240V 50/60HZ

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
RGBW


OPTIONAL

FINISHING: Black
 Grey
 White

BEAM ANGLE

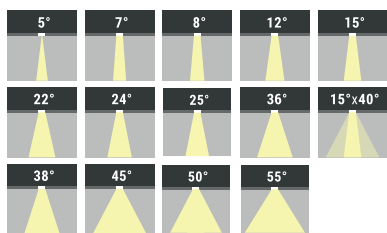

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40924120	120W	10311 lm	single RGB RGBW	5°/7°/8°/12°/15°/22° 24°/25°/36°/38°/45° 50°/55°/15°x40°	115 x 190 x 360 h / Ø 270

■ Nadir è una soluzione ad alta efficienza energetica ideale per illuminazione architettonica, giardinaggio, luci decorative, illuminazione di alberi e insegne. Unisce alte prestazioni, risparmio energetico e lunga durata, rendendolo una scelta affidabile ed elegante per applicazioni esterne. Alimentato da un sistema LED ad alta efficienza, garantisce una qualità luminosa eccellente.

Alloggiamento: Alluminio pressofuso con proprietà anticorrosive e impermeabili.

Riflettore: Lente ottica

Diffusore: Vetro temperato trasparente

LED: LED ad alta efficienza energetica (L80/B10/F10), durata di 50.000 ore, funzionante da -21°C a 56°C.

■ Nadir FL2 is an energy-efficient solution ideal for architectural, garden, accent, tree uplighting, and sign lighting. Combining high performance, energy savings, and a long lifespan, it is a reliable and stylish choice for various outdoor applications. Powered by a high-efficiency LED system, it delivers excellent lighting quality.

Housing: Die-cast aluminum with anti-corrosion and weatherproof properties.

Reflector: Optical lens

Diffuser: Transparent tempered glass

LED: Energy-efficient LED (L80/B10/F10), 50,000-hour lifespan, operational from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.



NADIR POLE INSTALLATION


8000

6000

4000

2000

0

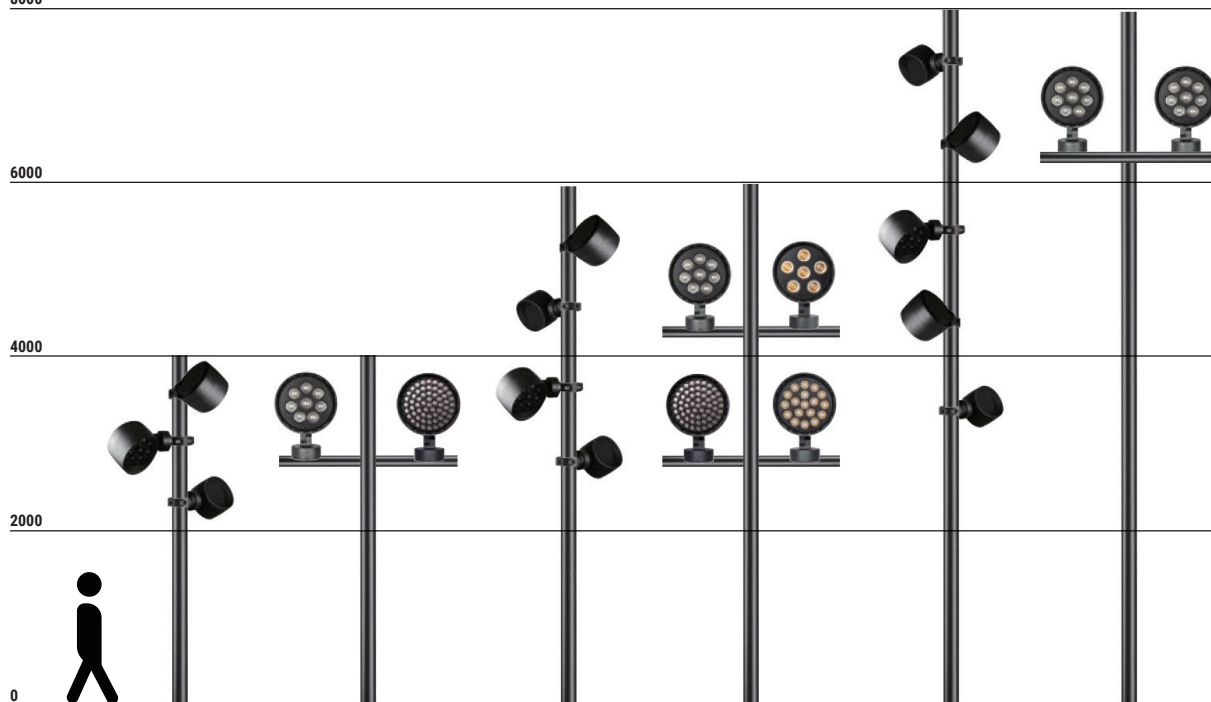

40923A609
Suitable for the pole
with Ø95mm-105mm



COMPLIANCE

LM-79 TM-21 LM-80

CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

