


OCCHIO



VOLTAGE

ON/OFF: AC100-240V/DC24V
DMX512: DC24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512
RD RDM

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW

OPTIONAL


FINISHING: Grey

INSTALLATION: Flood / Flood U Bracket
Pole Horizontal
Pole Vertical
Spike

BEAM ANGLE

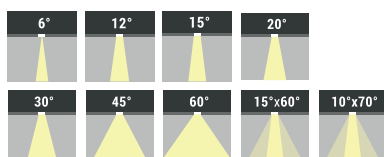

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40962360	360W	36pcs	25200 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø320 x 330 x 373 h
40963240	240W	24pcs	16800 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø320 x 330 x 373 h
40964120	120W	25pcs	10800 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø320 x 330 x 373 h
40964075	75W	16pcs	6750 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø260 x 275 x 303 h
40964045	45W	9pcs	4050 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø210 x 243 x 253 h
40964030	30W	6pcs	2700 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø180 x 229 x 223 h
40965020	20W	4pcs	1400 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø150 x 224 x 193 h
40965015	15W	4pcs	1050 lm	single	6°/12°/20°/30°/45°/60°/10x70°	Ø150 x 224 x 193 h
40963360	360W	36pcs	19800 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø320 x 330 x 373 h
40964240	240W	24pcs	13200 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø320 x 330 x 373 h
40964150	150W	24pcs	6000 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø320 x 330 x 373 h
40964100	100W	16pcs	4000 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø260 x 275 x 303 h
40964060	60W	9pcs	2400 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø210 x 243 x 253 h
40965030	30W	6pcs	1200 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø180 x 229 x 223 h
40966020*	20W	4pcs	800 lm	RGBW	6°/15°/20°/30°/60°/15x60°	Ø150 x 224 x 193 h

*Only DC24V

OCCHIO è il proiettore da paesaggio che trasforma ogni spazio esterno, rendendo l'illuminazione architettonica, il giardinaggio, l'uplighting su alberi e le insegne ancora più affascinanti e dinamici. Progettato per combinare prestazioni elevate ed efficienza energetica, Occhio è la soluzione ideale per chi cerca un design elegante senza rinunciare alla funzionalità. Il sistema LED avanzato garantisce un'illuminazione potente, uniforme e confortevole, con una lunga durata e consumi ridotti.

Alloggiamento: Realizzato in alluminio pressofuso, resistente agli agenti atmosferici e alla corrosione.

Diffusore: Vetro temperato trasparente

Riflettore: Lente ottica

LED: Tecnologia LED ad alta efficienza (L80/B10/F10), durata di 50.000 ore, funziona in un ampio range di temperature da -21°C a 56°C.

OCCHIO is the landscape projector that transforms any outdoor space, enhancing architectural lighting, garden features, tree uplighting, and signage with style and impact. Designed to balance high performance with energy efficiency, Occhio is the ideal choice for those seeking sleek design without compromising on functionality. The advanced LED system ensures powerful, uniform, and comfortable lighting with long-lasting durability and reduced energy consumption.

Housing: Die-cast aluminum, corrosion-resistant and weatherproof for lasting protection.

Diffuser: Transparent tempered glass

Reflector: Optical lens

LED: High-efficiency LED technology (L80/B10/F10), 50,000-hour lifespan, operational from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.


Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.



OCCHIO POLE INSTALLATION

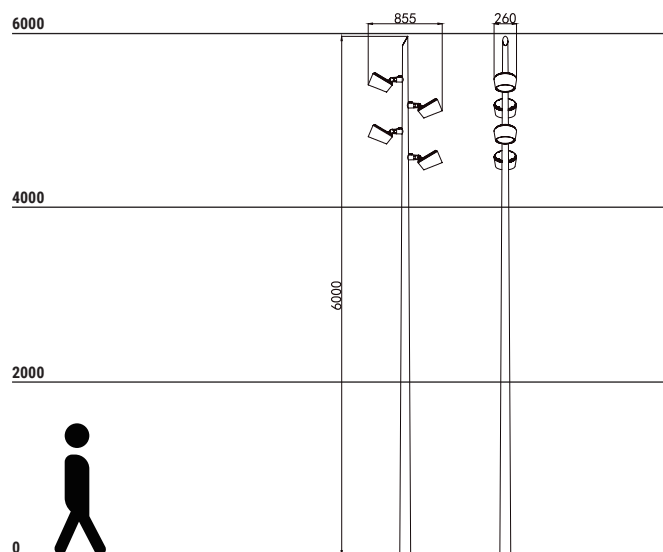

OCCHIO ACCESSORIES

U-Bracket
Flood installation



Pole
Horizontal installation



Pole
Vertical installation



Pole
Vertical installation



Spike
Ground installation



(1) Round-meshed grill
(2) Honeycomb
(3) Honeycomb glass



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

