
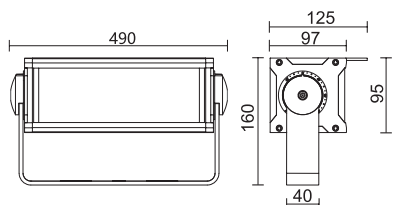


OPTICA

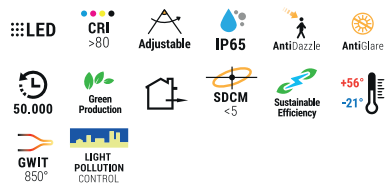

VOLTAGE

AC100-240V 50/60HZ

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512


CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white
RGB


OPTIONAL

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	L.COLOUR	SIZE (mm)
41249042	42W	3595 lm	8°/15°/25°/45°/15°x40°	single/RGB	490 x 125 x 160 h
41250067	67W	5695 lm	8°/15°/25°/45°/15°x40°	single/RGB	703 x 125 x 160 h
41251086	86W	5401 lm	8°/15°/25°/45°/15°x40°	single/RGB	916 x 125 x 160 h

Optica unisce una progettazione precisa con una tecnologia LED ad alte prestazioni, ideale per illuminare ampie aree esterne con luce intensa e uniforme. Progettato per offrire un'illuminazione potente mantenendo l'efficienza energetica, migliora l'aspetto visivo e la funzionalità di ogni spazio. Con un'installazione semplice e una manutenzione ridotta, il faretto Optica offre una soluzione di illuminazione affidabile e duratura per diverse applicazioni.

Alloggiamento: Struttura durevole in alluminio estruso

Riflettore: Lente ottica per una distribuzione della luce ad alta efficienza

Diffusore: Policarbonato

LED: Tecnologia LED ad alta efficienza (L80/B10/F10) con una durata di 50.000 ore, che funziona in modo affidabile a temperature comprese tra -21°C e 56°C

The **Optica** LED floodlight combines precision engineering with high-performance LED technology, ideal for illuminating large outdoor areas with bright, uniform light. Designed to provide powerful illumination while maintaining energy efficiency, it enhances the visual appeal and functionality of any space. With easy installation and minimal maintenance, the Optica floodlight offers a reliable, long-lasting lighting solution for a variety of applications.

Housing: Durable extruded aluminum construction

Reflector: Optical lens for high-efficiency light distribution

Diffuser: Polycarbonate, providing excellent resistance to impact and ensuring uniform light diffusion.

LED: High-efficiency LED technology (L80/B10/F10) with a 50,000-hour lifespan, performing reliably across temperatures from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

