



OPULENZA




DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white 3000K Warm white 4000K Neutral white 5000K Cool white 6000K Cool white 6500K Cool white
OPTIONAL	

FINISHING: White, Black

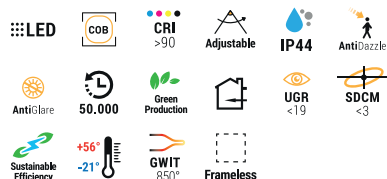

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
42909018	2 x 9W	1008 lm	24°/36°/45°	190 x 105	188 x 145 x 55 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
	1749	Ø0.83
2	437.4	Ø1.67
3	194.4	Ø2.51
4	109.3	Ø3.35
5	69.98	Ø4.19

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Opulenza è un downlight quadrato doppio senza bordo, con un'inclinazione gimbal fino a 25 gradi per una maggiore regolabilità. Il suo design senza cornice offre un'estetica elegante e raffinata che si integra perfettamente in qualsiasi ambiente.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Efficiente dal punto di vista energetico con classificazione L80/B10/F10, con una durata di 50.000 ore, e funzionante in modo efficace tra -21°C e 56°C.

Opulenza is a twin square trimless downlight, featuring a gimbal tilt of up to 25 degrees for enhanced adjustability. Its frameless design offers a stunning, sleek aesthetic that blends seamlessly into any space.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient with an L80/B10/F10 rating, offering a 50,000-hour lifespan, and operates effectively between -21°C and 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

