



ORIANA

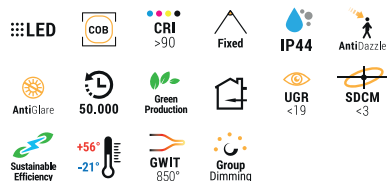

DRIVER OPTIONS

OF On/Off
PH Phase dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black



SURFACE / SUPERFICIE

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
40125015	15W	518 lm	80°	170.5 x 88 x 70 h
40126015	15W	1100 lm	80°	170.5 x 88 x 110 h

BEAM ANGLE



Italian: Oriana è una luce semi-incassata quadrata con un design elegante e bordi inclinati, che offre versatilità per adattarsi a diverse sorgenti luminose. Con la sua estetica moderna e funzionalità pratica, garantisce un'illuminazione efficiente aggiungendo un tocco di stile a qualsiasi interno. Il design minimalista la rende ideale per creare un'atmosfera sofisticata in ambienti residenziali e commerciali.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED a basso consumo con una classificazione L80/B10/F10, con una durata di 50.000 ore. Funziona in un intervallo di temperatura da -21°C a 56°C, garantendo prestazioni affidabili e durature.

English: Oriana is a square semi-recessed light featuring a sleek, sloped edge design, offering versatility to accommodate various light sources. With its modern aesthetic and practical functionality, it ensures efficient lighting while adding a stylish touch to any interior. The minimalistic design makes it ideal for creating a sophisticated atmosphere in both residential and commercial spaces.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED technology with an L80/B10/F10 rating, providing a 50,000-hour lifespan. Operates within a temperature range of -21°C to 56°C, ensuring long-lasting, reliable performance.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Important: Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

