
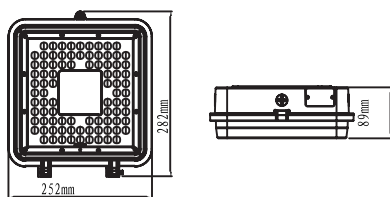


PARCHEGGIO PRO

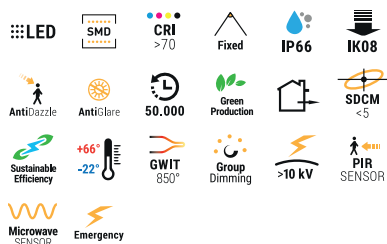

DRIVER OPTIONS

- OF** On/Off
IV 1/10V dimming

CCT OPTIONS

- 2700K** Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: Black

ACCESSORIES: Ceiling Mounting, Pipe Mounting, NPT

BEAM ANGLE



COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
40410040	40W	5600 lm	70°	282 x 252 x 89 h
40410060	60W	8400 lm	70°	282 x 252 x 89 h

Trasforma l'illuminazione del tuo parcheggio coperto con PARCHEGGIO, un apparecchio all'avanguardia dal design elegante e di lunga durata. Progettato per offrire un'illuminazione efficiente a basso abbagliamento, PARCHEGGIO presenta opzioni di copertura antiglare o lenti ottiche progettate con precisione per adattarsi a diverse esigenze di illuminazione.

PARCHEGGIO PRO vanta un design elegante e a basso profilo che si integra perfettamente con l'estetica dei parcheggi coperti.

Ottieni un'elevata efficienza con fino a 150 lumen per watt, garantendo un'illuminazione conveniente ed efficiente dal punto di vista energetico.

I sensori di movimento integrati contribuiscono al risparmio energetico attivando la luce solo quando necessario, migliorando l'efficienza complessiva.

Scegli tra opzioni di montaggio a soffitto e a tubo per flessibilità nell'installazione, adattandosi a varie disposizioni del garage.

Design snodato per un'installazione e manutenzione facili, garantendo un'esperienza senza problemi sia per la configurazione iniziale che per le operazioni in corso.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

LED: Riduce il consumo energetico, classificazioni L80/B10/F10 - Durata di vita 50.000 ore - Temperatura di lavoro: -22°C a 66°C

Transform the lighting in your covered parking with PARCHEGGIO, a cutting-edge fixture with an elegant and durable design. Designed to provide efficient low-glare illumination, PARCHEGGIO offers options of anti-glare covers or precisely designed optical lenses to adapt to various lighting needs.

PARCHEGGIO PRO boasts a sleek and low-profile design that seamlessly integrates with the aesthetics of covered parking.

Achieve high efficiency with up to 150 lumens per watt, ensuring cost-effective and energy-efficient lighting.

Built-in motion sensors contribute to energy savings by activating the light only when needed, enhancing overall efficiency.

Choose from ceiling and pipe mounting options for flexibility in installation, catering to various garage layouts.

Streamlined design for easy installation and maintenance, ensuring a hassle-free experience for both setup and ongoing care.

Housing: die-cast aluminum

Reflector: anodized aluminum

LED: Reduces energy consumption, L80/B10/F10 ratings - 50,000 hours lifetime - Working temperature: -22°C to 66°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

