
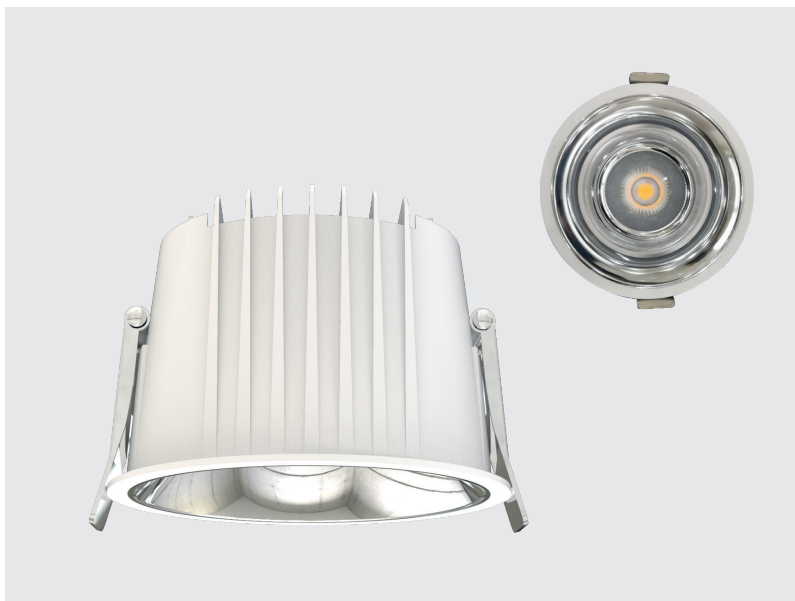



PARIDE

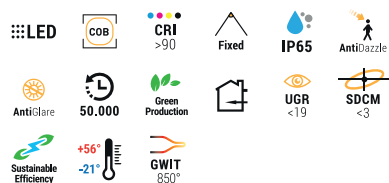

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac
PH Phase dimming

CCT OPTIONS


3000K Warm white
4000K Neutral white

OPTIONAL


REFLECTOR: White
Black
Matt Silver
Silver

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
40057010	10W	850 lm	24°/50°	Ø 75	Ø 87 x 66 h
40058012	12W	1180 lm	24°/50°	Ø 100	Ø 110 x 76 h
40058015	15W	1350 lm	24°/50°	Ø 100	Ø 110 x 76 h
40059020	20W	1180 lm	24°/50°	Ø 125	Ø 135 x 96 h
40059025	25W	1350 lm	24°/50°	Ø 125	Ø 135 x 96 h
40060030	30W	2700 lm	24°/50°	Ø 150	Ø 160 x 111 h
40060035	35W	3150 lm	24°/50°	Ø 150	Ø 160 x 111 h
40061035	35W	3150 lm	24°/50°	Ø 175	Ø 186 x 122 h
40061040	40W	3600 lm	24°/50°	Ø 175	Ø 186 x 122 h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



🇮🇹 Triplo design antiabbagliamento. Un nuovo tipo di illuminazione d'accento e downlight per illuminazione principale che integra funzioni impermeabili, antipolvere e antiriflesso, svolgendo molteplici compiti mantenendo un profondo Anti-glare.

Alloggiamento: alluminio pressofuso verniciato a polvere

Riflettore: alluminio anodizzato

Diffusore: vetro temperato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -21°C a 56°

🇬🇧 Triple anti-dazzle Design. A new type of accent lighting and main lighting downlight that integrates waterproof, dustproof, and multiple anti-glare functions, solved the multiple tasks of project application Deep Anti-glare.

Housing: die cast aluminium powder coated

Reflector: anodized aluminium

Diffuser: tempered glass

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

