
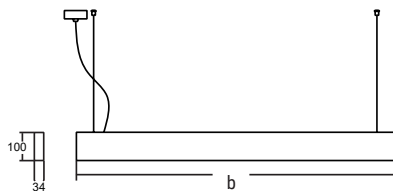


PENDENTE

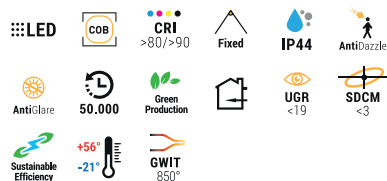

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
TR Triac

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL


FINISHING: White
Black
Gold
Red

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
31508005	5W	350 lm	10°/15°/24°/36°/50°	Ø50 x h 400 (1940)
31509005	5W	350 lm	10°/15°/24°/36°/50°	Ø50 x h 700 (2240)
31510007	7W	460 lm	10°/15°/24°/36°/50°	Ø50 x h 400 (1940)
31511007	7W	460 lm	10°/15°/24°/36°/50°	Ø50 x h 700 (2240)
31512015	15W	1200 lm	10°/15°/24°/36°/50°	Ø66 x h 400 (1960)
31513015	15W	1200 lm	10°/15°/24°/36°/50°	Ø66 x h 700 (2260)

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Il L'eleganza del suo design rende Pendente adatta a ogni installazione negli interni come pendente o come luce d'accento.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

Diffusore: lente in vetro temperato

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -21°C a 56°

The elegance of its design makes Pendente suitable for any indoor application as projector, pendant or accent light.

Housing: die cast aluminium

Reflector: anodized aluminiums

Diffuser: tempered glass lens

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

