
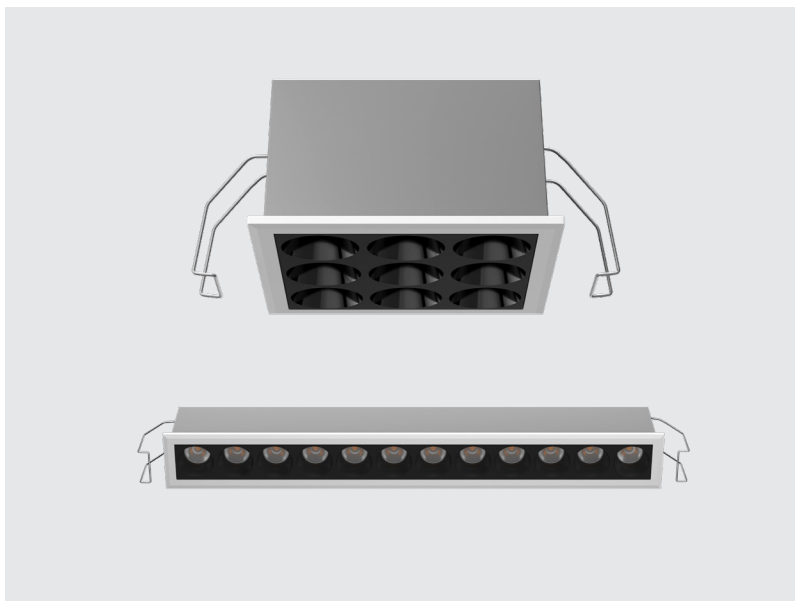
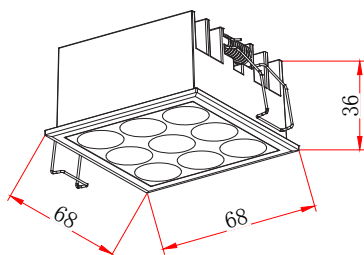


PITAIA

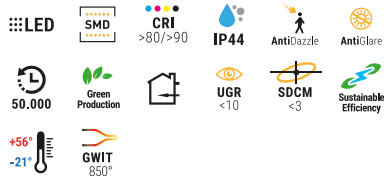

DRIVER OPTIONS

OF On/Off
DL DALI

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: iron gray heatsink, white frame

COD.	POWER	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
40709008	8 W	24°/38°	64 x 64	68 x 68 x 36 h
40709012	12 W	24°/38°	235 x 26	239 x 30 x 36 h

BEAM ANGLE



IT Pitaia, con la sua forma unica a griglia, è ideale per fornire un'illuminazione ampia e uniforme in spazi come corridoi, cucine, uffici e altro ancora. La griglia è progettata per diffondere la luce, aggiungendo texture e pattern che migliorano l'atmosfera e l'estetica di ogni ambiente.

Corpo: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Riduce il consumo energetico con una valutazione L80/B10/F10, offrendo una durata impressionante di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -21°C a 56°C.

UK Pitaia, with its unique grille shape, is perfect for providing broad and even lighting in spaces such as hallways, kitchens, offices, and more. The grille is specifically designed to diffuse the light, adding texture and pattern that enhances both the atmosphere and aesthetic of any room.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Reduces energy consumption with an L80/B10/F10 rating, offering an impressive 50,000-hour lifespan and reliable performance in temperatures ranging from -21°C to 56°C.

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

