




POSH TRIM

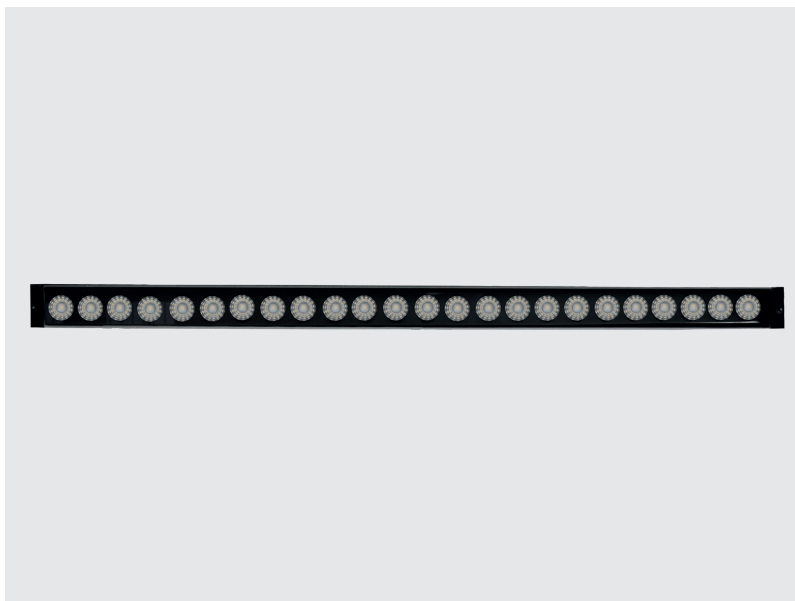

T ≤ 45°C

Frameless



VOLTAGE

AC220-240V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white


COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41144028	28W	2107 lm	8°/12°/22°/45°/15°x40°	1003 x 52	1000 x 52 x 95

OPTIONAL


FINISHING: Black

ACCESSORIES: Honeycomb louver

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Posh Trim, progettato per superare le aspettative della sua categoria, unisce resistenza, durata e stile. Realizzato per garantire prestazioni durature, resiste alle condizioni atmosferiche più difficili, all'umidità e a carichi pesanti. Il modulo illuminante con angolo di fascio regolabile assicura effetti di lavaggio parete precisi, rendendolo una soluzione di illuminazione esterna versatile ed efficiente. La fonte LED migliora l'efficienza energetica mantenendo alti standard professionali e un carattere ecologico.

Alloggiamento: Alluminio pressofuso

Diffusore: Vetro temperato trasparente

Accessori: Scatola in PVC per un fissaggio sicuro al suolo. Finitura RAL opzionale per un'estetica personalizzata.

LED: Tecnologia LED ad alta efficienza energetica, riducendo il consumo (L80/B10/F10), con una durata di 50.000 ore, adatta a temperature da -21°C a 56°C.

Posh Trim, designed to exceed the expectations of its category, the luminaire combines strength, durability, and style. Engineered for long-lasting performance, it resists harsh weather conditions, humidity, and heavy weight. The adjustable beam angle illuminant module ensures precise wall washing effects, making it a highly versatile and efficient outdoor lighting solution. The LED source enhances energy efficiency while maintaining high professional standards and eco-friendly features.

Housing: Die-cast aluminum

Diffuser: Transparent tempered glass

Accessories: PVC box for secure ground fixing. Optional RAL finish for personalized aesthetics.

LED: Energy-efficient LED technology reduces consumption (L80/B10/F10), offering a 50,000-hour lifespan, suitable for temperatures ranging from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

