



POSH UP1

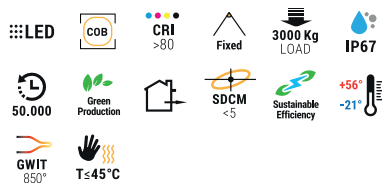

VOLTAGE

AC220-240V (16W)
AC180-264V (28W)
AC100-240V (42W)

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white

OPTIONAL


FINISHING: Silver

ACCESSORIES: Honeycomb louver

BEAM ANGLE




LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

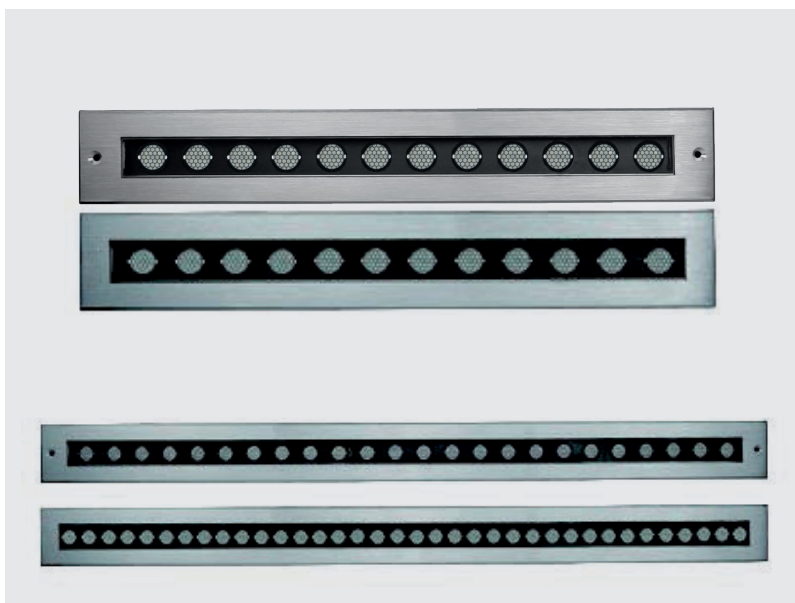

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41137016	16W	1121 lm	8°/12°/22°/45°/15°x40°	493 x 65	505 x 75 x 95 h
41138028	28W	2107 lm	8°/12°/22°/45°/15°x40°	918 x 65	930 x 75 x 95 h
41139042	42W	3256 lm	8°/12°/20°/45°/15°x40°	918 x 65	930 x 75 x 95 h

Posh Up1 è un faretto compatto ma potente progettato per offrire un'illuminazione di alta qualità in una varietà di applicazioni esterne. Realizzato per durare nel tempo, resiste a condizioni atmosferiche estreme, umidità e usura, rendendolo perfetto per un uso prolungato. Il fascio regolabile garantisce una distribuzione della luce mirata e controllata, ideale per illuminare paesaggi e caratteristiche architettoniche con precisione. La fonte LED garantisce risparmio energetico, mantenendo un alto standard di prestazioni e rispetto per l'ambiente.

Alloggiamento: Alluminio pressofuso

Diffusore: Vetro temperato trasparente

Accessori: Scatola in PVC per un fissaggio sicuro al suolo. Finiture RAL opzionali per un design personalizzato.

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10) con una durata di 50.000 ore, adatta a temperature da -21°C a 56°C

Posh Up1 is a compact yet powerful LED luminaire designed to deliver high-quality lighting in a range of outdoor applications. Built for durability, it resists extreme weather, moisture, and wear, making it perfect for long-term use. The adjustable beam ensures a targeted and controlled light distribution, perfect for illuminating landscapes and architectural features with precision. Its LED source guarantees energy savings while maintaining a high standard of performance and eco-friendliness.

Housing: Die-cast aluminum

Diffuser: Transparent tempered glass

Accessories: PVC box for secure ground mounting. Optional RAL finishes for personalized design.

LED: Energy-efficient LED technology (L80/B10/F10) with a 50,000-hour lifespan, suitable for temperatures ranging from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

