



POSH UP2

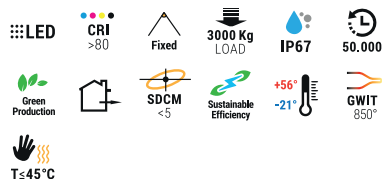

T_a ≤ 45°C



VOLTAGE

AC180-264V (14W)
AC100-240V (30W, 42W)
AC220-240V (60W)

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white

OPTIONAL


FINISHING: Silver

ACCESSORIES: Honeycomb louver

BEAM ANGLE




LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

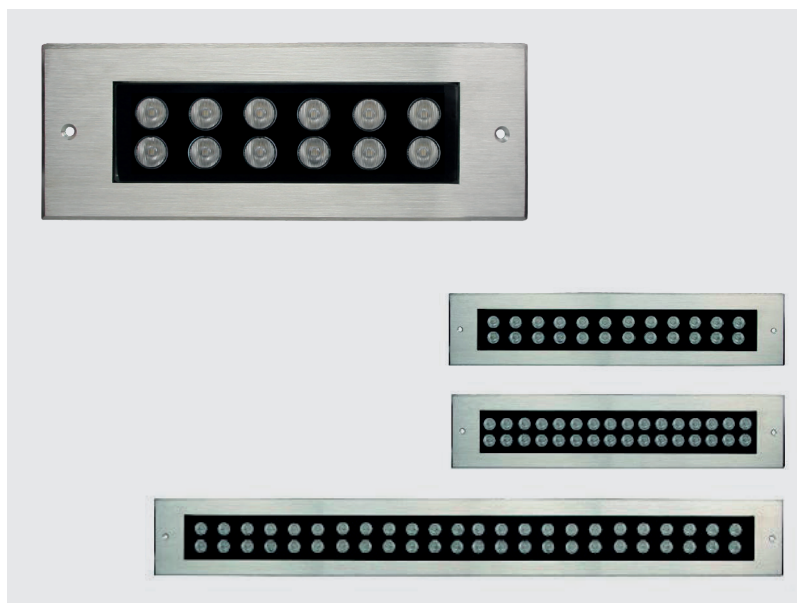

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41140014	14W	1509 lm	8°/12°/20°/45°/15°x40°	314 x 106	330 x 118 x 110 h
41141030	30W	2993 lm	8°/12°/20°/45°/15°x40°	544 x 106	560 x 118 x 110 h
41142042	42W	3207 lm	8°/12°/20°/45°/15°x40°	544 x 106	560 x 118 x 110 h
41143060	60W	5762 lm	8°/12°/20°/45°/15°x40°	984 x 106	1000 x 118 x 110 h

Posh Up2 è un faro di alta qualità progettato per prestazioni elevate e resistenza. Perfetto sia per applicazioni residenziali che commerciali, unisce la tecnologia LED avanzata a un design elegante e durevole che resiste alle intemperie, all'umidità e allo stress fisico. Il fascio regolabile consente un controllo preciso dell'illuminazione, ideale per mettere in risalto elementi architettonici e valorizzare gli spazi esterni. La fonte LED ecologica offre un'illuminazione efficiente e duratura.

Alloggiamento: Alluminio pressofuso

Diffusore: Vetro temperato trasparente

Accessori: Scatola in PVC per un fissaggio sicuro al suolo. Finiture RAL opzionali per un aspetto personalizzato.

LED: Tecnologia LED ad alta efficienza energetica con classificazione L80/B10/F10, garantendo una durata di 50.000 ore e funzionando efficacemente a temperature da -21°C a 56°C

Posh Up2 is a top-tier luminaire designed for high performance and resilience. Perfect for both residential and commercial applications, it combines advanced LED technology with a sleek, durable design that resists harsh weather, humidity, and physical stress. The adjustable beam allows precise lighting control, making it ideal for highlighting architectural features and enhancing outdoor spaces. With an environmentally-conscious LED source, it provides long-lasting, efficient illumination.

Housing: Die-cast aluminum

Diffuser: Transparent tempered glass

Accessories: PVC box for secure ground installation. Optional RAL finishes for a customized look.

LED: Energy-efficient LED technology with L80/B10/F10 rating, providing a 50,000-hour lifespan and operating effectively in temperatures from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

