


PRESTIGIO



DRIVER OPTIONS


OF On/Off

CCT OPTIONS

2700K Warm white
 3000K Warm white
 4000K Neutral white
 5000K Cool white
 6000K Cool white
 6500K Cool white


OPTIONAL

FINISHING: White, Black

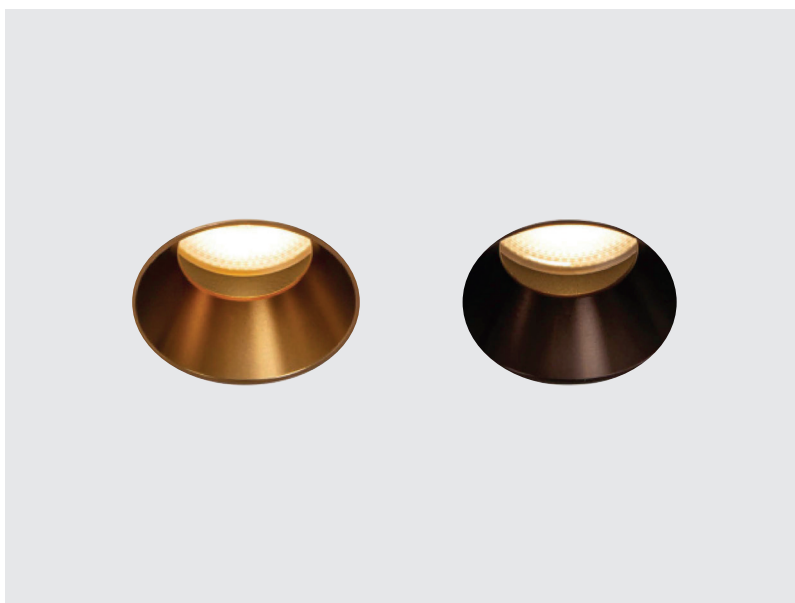

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
42902007	7W	560 lm	20°/30°/40°	Ø45	Ø90 x 90 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	633.2	Ø0.58
2	158.3	Ø1.16
3	70.36	Ø1.74
4	39.58	Ø2.32
5	25.33	Ø2.90

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Prestigio è un downlight profondamente incassato senza bordo, progettato con una lente frontale focale e un UGR ultra-basso per offrire un comfort visivo eccezionale con minimo abbagliamento. Il suo design elegante e moderno, combinato con prestazioni elevate, lo rende la soluzione perfetta per ambienti residenziali e commerciali che richiedono un'illuminazione efficace e priva di abbagliamento.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Efficiente dal punto di vista energetico con una valutazione L80/B10/F10, con una durata di 50.000 ore. Funziona in modo affidabile tra -21°C e 56°C per prestazioni ottimali.

UK Prestigio is a trimless deep recessed downlight, designed with a front focal lens and an ultra-low UGR to deliver exceptional visual comfort with minimal glare. Its sleek and modern design, combined with high performance, makes it a perfect solution for both residential and commercial spaces that demand effective and glare-free lighting.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient with an L80/B10/F10 rating, providing a 50,000-hour lifespan. Operates reliably between -21°C and 56°C for optimal performance.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

