
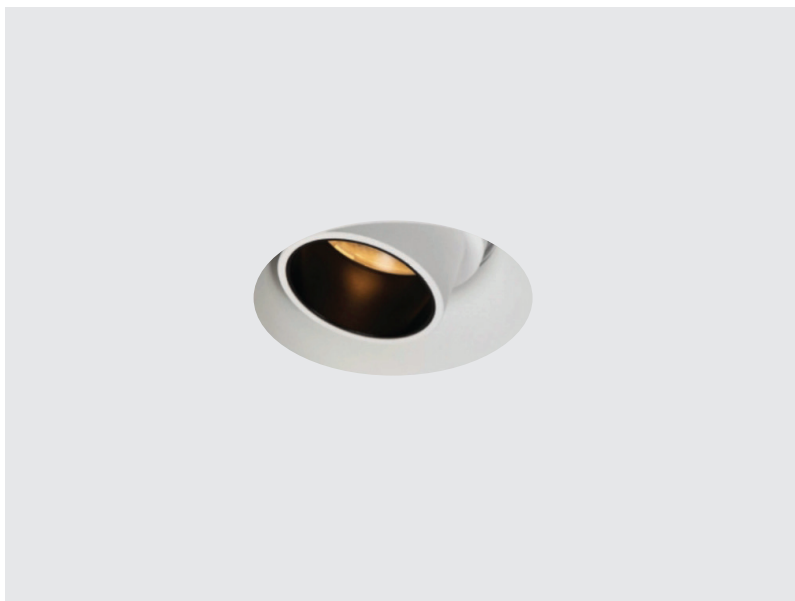


PRIMULA




DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white 3000K Warm white 4000K Neutral white 5000K Cool white 6000K Cool white 6500K Cool white
OPTIONAL	

FINISHING: White, Black

COD.	POWER	LUMEN	B. ANGLE	HOLE (mm)	DIM./SIZE (mm)
42906010	10W	650 lm	15°/24°/36°/50°	Ø90	Ø78 x 78 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	1875	Ø0.69
2	468.8	Ø1.37
3	208.4	Ø2.06
4	117.2	Ø2.75
5	75.01	Ø3.44

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Design senza cornice con snoot nero per un aspetto elegante e UGR molto basso. Realizzato con alloggiamento in alluminio pressofuso e riflettore in alluminio anodizzato per durata e prestazioni.

Alloggiamento: alluminio pressofuso

Riflettore: alluminio anodizzato

LED: A basso consumo energetico con rating L80/B10/F10, offre una durata di 50.000 ore. Le temperature di funzionamento vanno da -21°C a 56°C per prestazioni affidabili.

Trimless design with black snoot for a sleek appearance and very low UGR. Crafted with die-cast aluminum housing and anodized aluminum reflector for durability and performance.

Housing: die-cast aluminum

Reflector: anodized aluminum

LED: Energy-efficient with L80/B10/F10 rating, offering a lifespan of 50,000 hours. Operating temperatures range from -21°C to 56°C for reliable performance.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

