
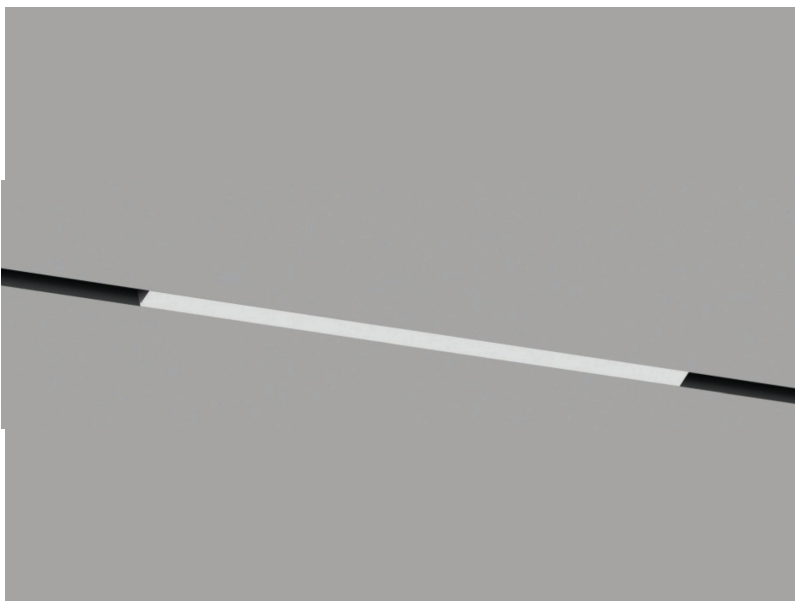



PROFUMO 2

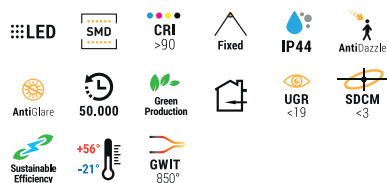

DRIVER OPTIONS

OF On/Off
DL DALI

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	B. ANGLE	DIM./SIZE (mm)
41790013	13 W	1400 lm	Flood	600 x 22.3 x 23.7 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	Ø(m)
1	121.5	Ø3.10
2	30.37	Ø6.22
3	13.50	Ø9.32
4	7.592	Ø12.4
5	4.859	Ø15.5

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Profumo 2 è la versione più lunga di Profumo 1, una luce diffusa con un design senza bordi, perfetta per l'integrazione con un sistema di binari magnetici 48V. La sua estetica minimalista e l'efficienza luminosa lo rendono una scelta ideale per creare illuminazione ambientale in vari spazi.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con una valutazione L80/B10/F10, con una lunga durata di 50.000 ore. Progettato per operare a temperature comprese tra -21°C e 56°C.

Profumo 2 is the longer version of Profumo 1, a diffused light fixture with a trimless design, perfectly suited for integration with a 48V magnetic track system. Its minimalist aesthetic and efficient light output make it an ideal choice for creating ambient lighting in various spaces.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Reduced energy consumption with an L80/B10/F10 rating, offering a long lifespan of 50,000 hours. Designed to operate within a temperature range of -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

