


RACNA

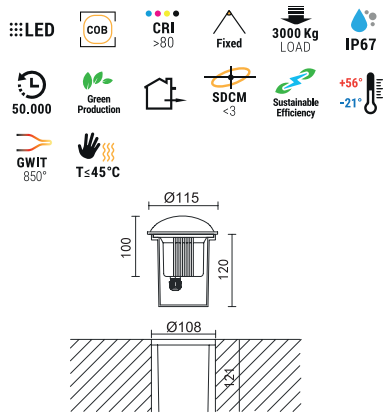

VOLTAGE

AC100-240V (4W, 6W)
AC220-240V (11W)

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
IV 1/10V dimming	4000K Neutral white
TR Triac	5000K Cool white


OPTIONAL

FINISHING: Grey

BEAM ANGLE




LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

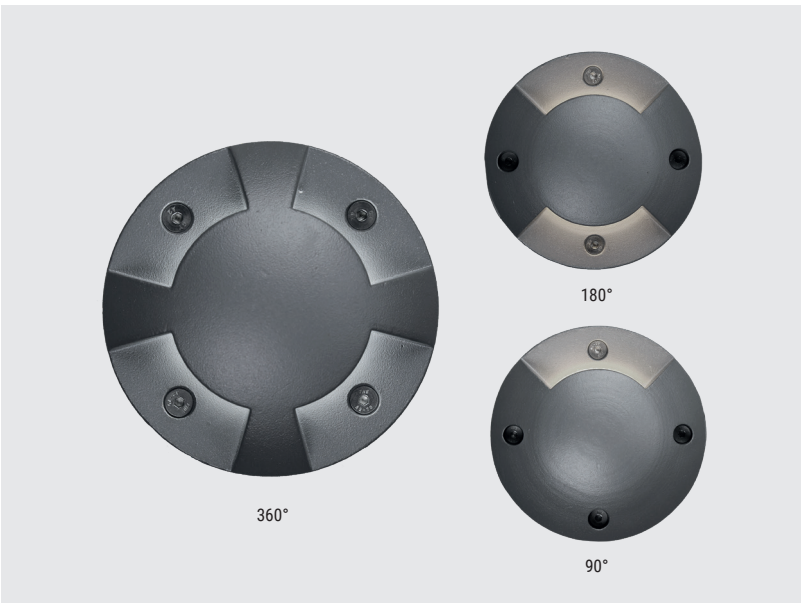

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41123004	4W	40 lm	90°/180°/360°	Ø 108	Ø 115 x 120 h
41124006	6W	80 lm	90°/180°/360°	Ø 158	Ø 165 x 150 h
41125011	11W	170 lm	90°/180°/360°	Ø 210	Ø 220 x 193 h

Italy Racna offre una soluzione di illuminazione indiretta efficiente, ideale per tutte le esigenze di illuminazione paesaggistica. Realizzata con un corpo in lega di alluminio 6063 con trattamento anodizzato, la luce è progettata per garantire durata e prestazioni. La piastra frontale è in acciaio inox, mentre la copertura della lampada è in vetro temperato ad alta resistenza. La luce è brillante, pura e uniforme, creando un effetto visivamente accattivante negli spazi esterni.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inox.

Diffusore: Vetro temperato trasparente.

Accessori: Include una scatola in PVC per un'installazione sicura a terra.

LED: Tecnologia LED ad alta efficienza con prestazioni L80/B10/F10, con una durata di 50.000 ore e funzionamento affidabile in un intervallo di temperatura da -21°C a 56°C

United Kingdom Racna in-ground light offers an efficient and indirect lighting solution, ideal for all landscape lighting needs. Crafted from a 6063 aluminium alloy body with an anodized finish, the light is built for durability and performance. The faceplate is made from stainless steel, while the lampshade is constructed from high-strength toughened glass. The light produces a bright, pure, and uniform glow, enhancing outdoor spaces with a visually appealing effect.

Housing: Die-cast aluminium with a stainless steel cover.

Diffuser: Transparent tempered glass.

Accessories: Includes a PVC box for secure ground installation.

LED: Energy-efficient LED technology with L80/B10/F10 ratings, offering a 50,000-hour lifespan and reliable operation in temperatures ranging from -21°C to 56°C

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

