



RESPIRO QUADRO

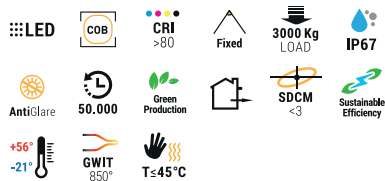

VOLTAGE

AC220-240V (15W)
AC220-230V (42W)

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
6000K Cool white


OPTIONAL

FINISHING: Silver

BEAM ANGLE



LIGHT DISTRIBUTION




COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	SIZE (mm)
41134015	15W	999 lm	Asymmetric	214 x 106	330 x 118 x 110 h
41135042	42W	3307 lm	Asymmetric	420 x 146	450 x 160 x 160 h

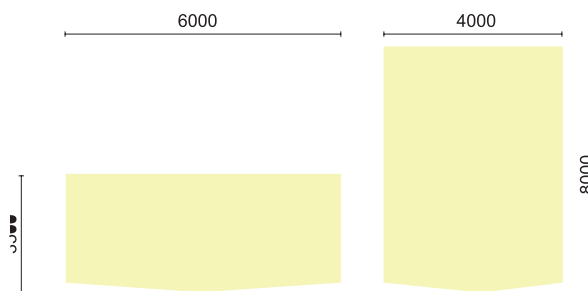

The map shows the effect of the product installed 0.6m away from the wall.
The light range can be defined according to different installation distances.

Respiro Quadro è elegante e durevole, progettato per offrire prestazioni ottimali anche negli ambienti più difficili. La sua forma compatta nasconde una resistenza straordinaria, in grado di sopportare carichi pesanti e condizioni climatiche estreme. Dotato di tecnologia LED ad alta efficienza, garantisce un'illuminazione eccezionale riducendo al minimo il consumo energetico, combinando così affidabilità e sostenibilità.

Alloggiamento: Alluminio pressofuso con copertura in acciaio inossidabile

Diffusore: Vetro temperato trasparente

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), con una durata di 50.000 ore e prestazioni affidabili in un intervallo di temperature da -21°C a 56°C.

The **Respiro Quadro** is a sleek, durable luminaire designed for optimal performance in the harshest environments. Its compact form belies its strength, with the ability to endure heavy loads and extreme weather conditions. Equipped with high-efficiency LED technology, it provides exceptional lighting while minimizing energy consumption, making it the perfect blend of reliability and sustainability.

Housing: Die-cast aluminum with a stainless steel cover

Diffuser: Transparent tempered glass

LED: High-efficiency LED technology (L80/B10/F10), offering a 50,000-hour lifespan and reliable performance across temperatures from -21°C to 56°

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

