
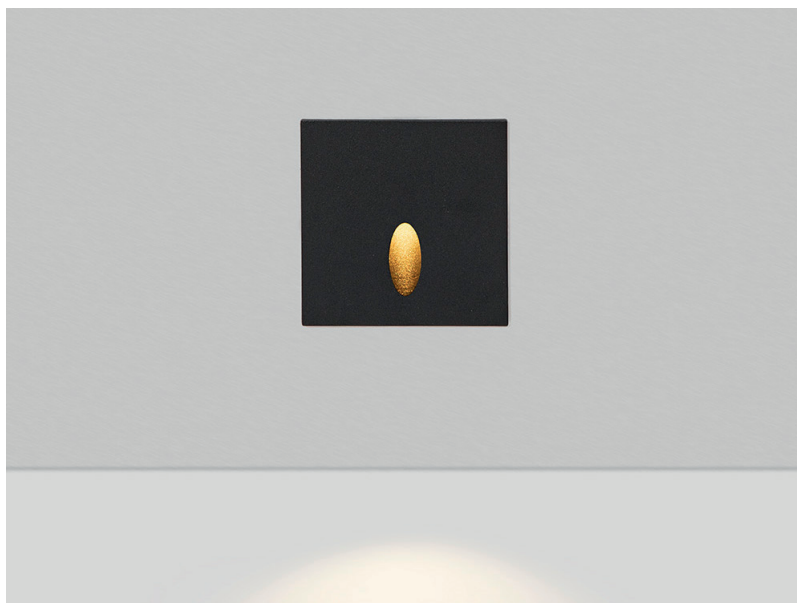



ROTONDO SQUARE

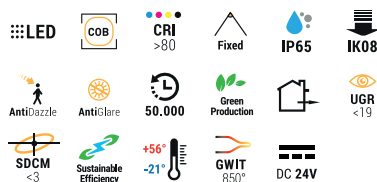

DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6000K Cool white
6500K Cool white

OPTIONAL

FINISHING: White, Black

ACCESSORIES: Stainless steel clip, premount sleeve

COD.	POWER	LUMEN	B.ANGLE	HOLE (mm)	DIM./SIZE (mm)
41411003	3W	140 lm	Flush	Ø55	65 x 32 x 65 h

BEAM ANGLE



Rotondo 2 è una lampada da parete dal design unico che combina una cornice ovale con una struttura quadrata, creando un'estetica raffinata e distintiva. La sua forma audace ma elegante arricchisce gli spazi esterni moderni, offrendo un'illuminazione funzionale e di grande impatto visivo. Progettata per garantire resistenza e affidabilità, Rotondo Square unisce stile e prestazioni durature.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED ad alte prestazioni con classificazione L80/B10/F10, durata di 50.000 ore e funzionamento affidabile con temperature da -21°C a 56°C

Rotondo 2 is a distinctive wall light that combines an oval bezel with a square design, creating a unique and refined aesthetic. Its bold yet elegant form enhances contemporary outdoor spaces, delivering both visual appeal and functional illumination. Designed for durability, Rotondo Square provides reliable lighting while maintaining a sleek, modern presence.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: High-performance LED with an L80/B10/F10 rating, ensuring a 50,000-hour lifespan and consistent performance in temperatures from -21°C to 56°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

