

SCANTO

LED

C0B

CRI >80

Adjustable

IP44

AntiDazzle

Antiglare

50.000

Green Production



UGR <19

SDCM <3

Sustainable Efficiency

+56° -21°

GWIT 850°

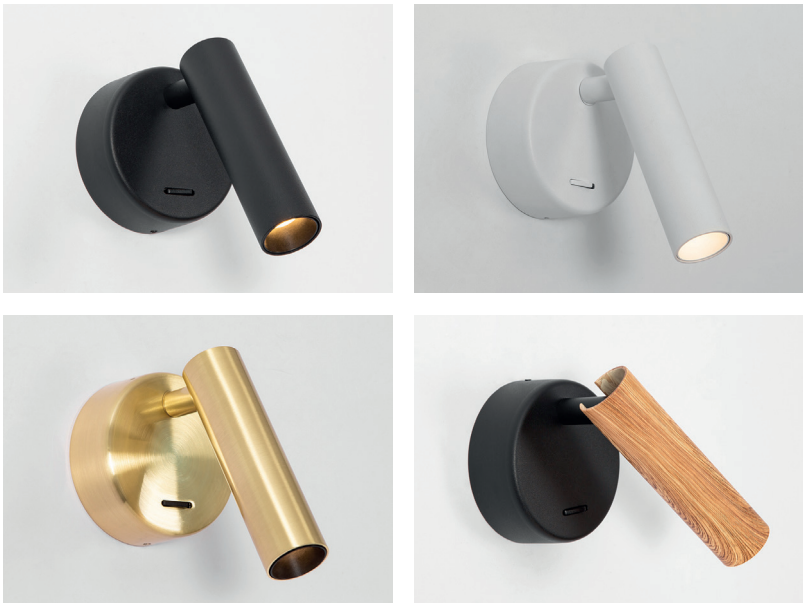

DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
	3000K Warm white
	4000K Neutral white
	5000K Cool white
	6000K Cool white
	6500K Cool white
OPTIONAL	

FINISHING: White, Black, Brass, Wood

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
41299002	2.1W	266 lm	40°	Ø29 x 110 h

BEAM ANGLE



Scanto è una luce da lettura elegante e funzionale con Driver LED integrato, progettata per garantire efficienza e un'estetica moderna. Il suo design compatto la rende una soluzione intelligente per ambienti contemporanei, offrendo un'illuminazione mirata a basso consumo energetico. Perfetto per ambienti residenziali e hotel, Scanto offre un'illuminazione versatile con un tocco raffinato. Disponibile in finiture speciali come Ottone e Legno, si integra perfettamente in diversi stili d'interni, aggiungendo eleganza e calore.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Tecnologia LED a basso consumo con classificazione L80/B10/F10, durata di 50.000 ore e funzionamento stabile con temperature da -21°C a 56°C

Scanto is a sleek and functional reading light featuring a Built-In Driver LED, designed for efficiency and modern aesthetics. Its compact form makes it a smart solution for contemporary spaces, offering targeted illumination with minimal energy consumption. Perfect for both residential and hospital-ity environments, Scanto provides versatile lighting with a refined touch. Available in special finishes like Brass and Wood, it seamlessly integrates into various interior styles, adding elegance and warmth.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Energy-efficient LED technology with an L80/B10/F10 rating, ensuring a 50,000-hour lifespan and reliable performance in temperatures from -21°C to 56°C

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

