
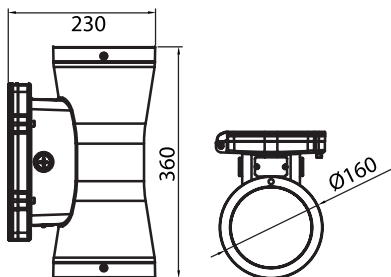


SIDRA

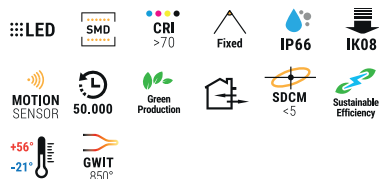

DRIVER OPTIONS

OF On/Off
IV 1/10V dimming

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white


COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
41277020	2x10W	2400 lm	12°/30°/60°/15x30°/20x60°/75°	Ø160 x 230 x 360 h
41277040	2x20W	4800 lm	12°/30°/60°/15x30°/20x60°/75°	Ø160 x 230 x 360 h
41277060	2x30W	7200 lm	12°/30°/60°/15x30°/20x60°/75°	Ø160 x 230 x 360 h

OPTIONAL


FINISHING: Black

FUNCTION: Motion sensor

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



IT Sidra è un'applicazione da esterno a parete, saliscendi. Composto da una pressofusione di alluminio e vetro di sicurezza appositamente lavorato, impedisce l'accumulo di sporco e acqua sugli apparecchi, mantenendo un livello di impermeabilità IP66. Con il suo design compatto, si integra silenziosamente nell'ambiente architettonico di giorno e di notte. Varietà di distribuzione della luce a fascio stretto a scelta con emissione di luce dall'alto e dal basso. Apparecchio da parete diretto/indiretto, questo apparecchio unisce forme decorative e funzionali in perfetto equilibrio.

Alloggiamento: alluminio pressofuso

Riflettore: vetro temperato

Diffusore: vetro temperato trasparente

LED: risparmio energetico L80/B10/F10 - durata 50.000h - temperatura di lavoro da -21°C a 56°

UK Sidra LED cylinder outdoor wall wash, up and down scone light. Equipped with die-casting aluminum and specially processed safety glass prevents dirt and water from accumulating on the luminaires, IP66 waterproof level. With its unpretentious and compact design, quietly blends into architectural environment at day and night. Variety narrow beam light distribution optionally with light emission from up and down. A direct/indirect wall luminaire, this fixture brings decorative and functional forms in perfect balance.

Housing: die cast aluminum

Diffuser: tempered glass

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

