



SIRIO FL2

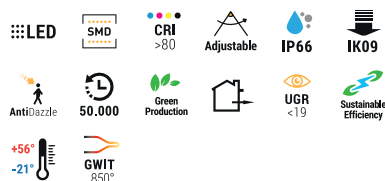

VOLTAGE

AC100-240V/DC24V

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming
DX DMX512

CCT OPTIONS

2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGBW


OPTIONAL

FINISHING: Grey


COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40948095	95W	20pcs	8550 lm	single	6°/12°/20°/30°/60°/10x70°	1000 x 92 x 110h
40948048	48W	10pcs	4320 lm	single	6°/12°/20°/30°/60°/10x70°	500 x 92 x 110h
40948030*	30W	6pcs	2700 lm	single	6°/12°/20°/30°/60°/10x70°	300 x 92 x 110h
40949095	95W	20pcs	4750 lm	RGBW	8°/15°/20°/30°/10x30°/10x70°	1000 x 92 x 110h
40949050	50W	10pcs	2400 lm	RGBW	8°/15°/20°/30°/10x30°/10x70°	500 x 92 x 110h
40949030*	30W	6pcs	1500 lm	RGBW	8°/15°/20°/30°/10x30°/10x70°	300 x 92 x 110h

*Only DC24V

BEAM ANGLE

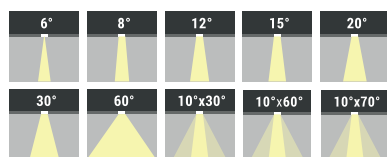

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy Sirio FL2 offre un'illuminazione efficiente per spazi esterni di medie e grandi dimensioni. Con il suo design compatto ma resistente, questo apparecchio fornisce un'illuminazione di alta qualità, perfetta per illuminare facciate, giardini e altre caratteristiche architettoniche. Il Sirio FL2 è efficiente dal punto di vista energetico, duraturo e facile da installare, rendendolo una scelta ideale per progetti residenziali e commerciali.

Alloggiamento: Alluminio pressofuso**Diffusore:** Vetro temperato**Riflettore:** Lente ottica

LED: Tecnologia LED ad alta efficienza energetica (L80/B10/F10), con una durata di 50.000 ore, affidabile a temperature comprese tra -21°C e 56°C.

UK The Sirio FL2 LED floodlight offers efficient lighting for medium to large outdoor spaces. With its compact yet durable design, this fixture provides high-quality illumination, perfect for lighting facades, gardens, and other architectural features. The Sirio FL2 is energy-efficient, long-lasting, and easy to install, making it a great choice for both residential and commercial projects.

Housing: Die-cast aluminum**Diffuser:** Tempered glass**Reflector:** Optical lens

LED: Energy-efficient LED technology (L80/B10/F10), 50,000-hour lifespan, reliable in temperatures from -21°C to 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

