


SIRIO FL3

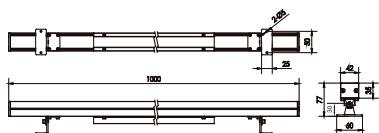

VOLTAGE

DC24V

DRIVER OPTIONS

OF On/Off
DX DMX512

CCT OPTIONS


2700K Warm white
3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white
RGB

OPTIONAL


FINISHING: Grey

COD.	POWER	LED Q.ty	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40950036	36W	36pcs	3060 lm	single	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h
40950024	24W	24pcs	2040 lm	single	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h
40950018	18W	18pcs	1530 lm	single	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h
40951036	36W	36pcs	1260 lm	RGB	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h
40951024	24W	24pcs	840 lm	RGB	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h
40951018	18W	18pcs	630 lm	RGB	8°/12.5°/20°/30°/60°/15x30°/10x60°	1000 x 60 x 77h

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



Italy The Sirio FL3 LED floodlight is engineered to deliver high-performance illumination for large outdoor spaces. Its robust construction and advanced LED technology ensure excellent light distribution while minimizing energy consumption. With an easy-to-install design and durable materials, the Sirio FL3 is ideal for commercial and industrial applications, providing long-lasting and reliable lighting solutions for any environment.

Housing: Die-cast aluminum**Diffuser:** Clear tempered glass**Reflector:** Optical lens

LED: High-efficiency LED technology (L80/B10/F10), 50,000-hour lifespan, reliable from -21°C to 56°C.

United Kingdom Sirio FL3 è progettato per offrire un'illuminazione ad alte prestazioni per ampie aree esterne. La sua costruzione robusta e la tecnologia LED avanzata garantiscono una distribuzione ottimale della luce, riducendo al minimo il consumo energetico. Con un design facile da installare e materiali resistenti, il Sirio FL3 è ideale per applicazioni commerciali e industriali, fornendo soluzioni di illuminazione durature e affidabili per qualsiasi ambiente.

Alloggiamento: Alluminio pressofuso**Diffusore:** Vetro temperato trasparente**Riflettore:** Lente ottica

LED: Tecnologia LED ad alta efficienza (L80/B10/F10), con una durata di 50.000 ore, affidabile da -21°C a 56°C.

! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

