

SOLE



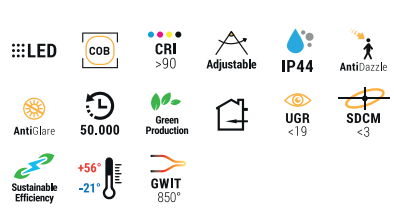



DRIVER OPTIONS

OF On/Off

CCT OPTIONS

2700K	Warm white
3000K	Warm white
4000K	Neutral white
5000K	Cool white
6000K	Cool white
6500K	Cool white

OPTIONAL

FINISHING: White, Black

COD.	POWER	LUMEN	B.ANGLE	DIM./SIZE (mm)
41780015	15W	950 lm	15°-60°	150 x 70 h

BEAM ANGLE



LIGHT DISTRIBUTION

h(m)	E(lx)	ø(m)
1	7915	ø0.31
2	1979	ø0.62
3	879.5	ø0.93
4	494.7	ø1.24
5	316.6	ø1.55

COMPLIANCE

LM-79 TM-21 LM-80

CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES

Sole è un faretto per binario con lente zoom e design compatto, ideale per fornire un'illuminazione focalizzata e regolabile. Le sue caratteristiche innovative e il design versatile lo rendono la scelta perfetta per applicazioni di illuminazione dinamica.

Alloggiamento: Alluminio pressofuso

Riflettore: Alluminio anodizzato

LED: Basso consumo energetico con classificazione L80/B10/F10, garantendo una durata di 50.000 ore. Adatto per temperature comprese tra -21°C e 56°C.

Sole track spotlight, equipped with a zoom lens and a compact body design, is ideal for providing focused, adjustable illumination. Its innovative features and versatile design make it a perfect choice for dynamic lighting applications.

Housing: Die-cast aluminum

Reflector: Anodized aluminum

LED: Low energy consumption with L80/B10/F10 rating, providing a lifespan of 50,000 hours. Suitable for operating temperatures ranging from -21°C to 56°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at **www.flussirari.it.** These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.