
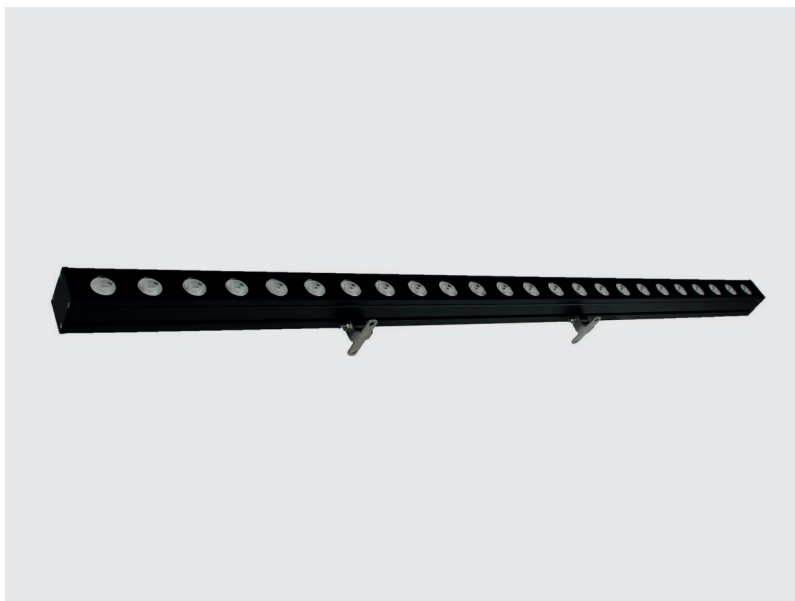
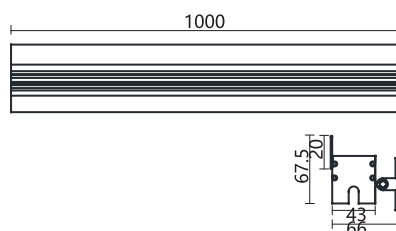



SOLOP

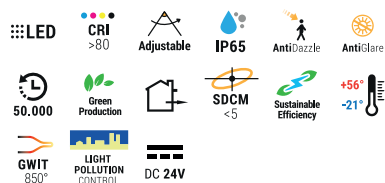


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DX DMX512	3000K Warm white
	4000K Neutral white
	6000K Cool white
	RGB
	RGBW
OPTIONAL	

FINISHING: Black

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	B.ANGLE	L.COLOUR	SIZE (mm)
41242048	48W	2042 lm	8°/15°/25°/45°/15°x40°	single/RGBW	1000 x 23 x 20 h

Il faretto lineare Solop è progettato per applicazioni di wallwashing precise, offrendo un perfetto equilibrio tra forma e funzionalità. La tecnologia LED ad alte prestazioni garantisce un'illuminazione potente e uniforme, che esalta la bellezza architettonica di ogni facciata. Con un'installazione semplice e una lunga durata di servizio, Solop offre un'illuminazione affidabile ed efficiente per vari ambienti esterni.

Alloggiamento: Realizzato in alluminio estruso

Riflettore: Lente ottica avanzata

Diffusore: Policarbonato

LED: Tecnologia LED a risparmio energetico (L80/B10/F10) con una durata di 50.000 ore, che funziona efficacemente a temperature comprese tra -21°C e 56°C

The Solop linear lighting fixture is designed for precise wallwashing applications, providing a seamless blend of form and function. Its high-performance LED technology ensures powerful, even illumination that enhances the architectural beauty of any facade. With easy installation and a long service life, the Solop fixture offers dependable, energy-efficient lighting for a variety of outdoor environments.

Housing: Crafted from extruded aluminum

Reflector: Advanced optical lens

Diffuser: Polycarbonate

LED: Energy-saving LED technology (L80/B10/F10) with a 50,000-hour lifespan, operating effectively in temperatures ranging from -21°C to 56°C

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

