


SPRINT

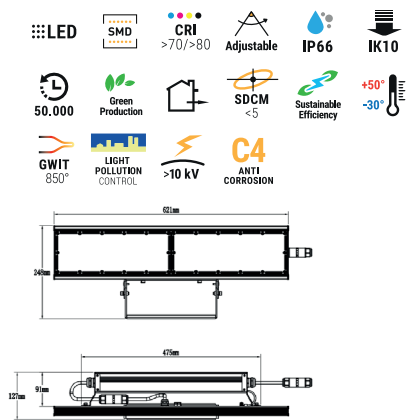

VOLTAGE
AC100-240V 50/60HZ


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	4000K Neutral white
DL DALI	5000K Cool white

OPTIONAL
FINISHING: Black
MOUNTING: Bracket, Pole


BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE
LM-79 TM-21 LM-80

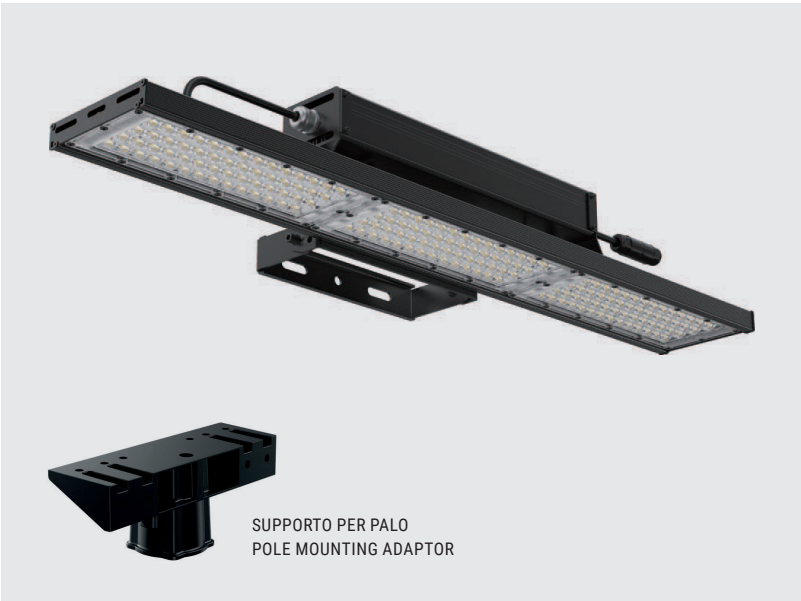

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
31001240	240W	41594 lm	Asymmetrical / 38°	621 x 248 x 127 h
31002320	320W	57135 lm	Asymmetrical / 38°	929 x 248 x 127 h

Il proiettore SPRINT offre un basso abbagliamento, rendendolo la soluzione ideale per l'illuminazione di campi da tennis e padel. Con sistema di montaggio opzionale a staffa e palo, questa apparecchiatura dispone di una grande superficie luminosa per una migliore uniformità dell'illuminazione e un comfort visivo ottimale.

Alloggiamento: Alluminio pressofuso con finitura verniciata a polvere

Diffusore: Vetro temperato trasparente.

Riflettore: Alluminio anodizzato

LED: Efficienza energetica con classificazione L80/B10/F10, una durata straordinaria di 50.000 ore e la capacità di funzionare in temperature da -30°C a 50°C.

The SPRINT floodlight offers low glare, making it the perfect solution for illuminating both tennis and padel courts. With an optional bracket and pole mounting system, this luminaire features a large luminous surface for superior lighting uniformity and visual comfort.

Housing: Die-cast aluminum with a powder-coated finish

Diffuser: Transparent tempered glass

Reflector: Anodized aluminum

LED: Energy-efficient with L80/B10/F10 ratings, featuring a remarkable 50,000-hour lifespan and capable of performing in temperatures from -30°C to 50°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product. For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions. Compliance may vary in each power supply based on country-specific technical regulations.

