



# STYLIO

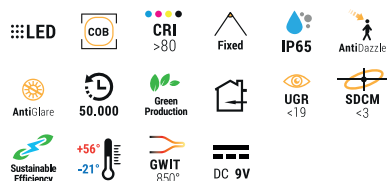

| DRIVER OPTIONS                  | CCT OPTIONS                                                                                                             | COD.     | POWER | LUMEN  | DIM./SIZE (mm)    |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------|-------|--------|-------------------|
| OF On/Off                       | 2700K Warm white<br>3000K Warm white<br>4000K Neutral white<br>5000K Cool white<br>6000K Cool white<br>6500K Cool white | 40141004 | 4W    | 220 lm | 100 x 150 x 300 h |
| OPTIONAL                        |                                                                                                                         |          |       |        |                   |
| FINISHING: White, Black, Silver |                                                                                                                         |          |       |        |                   |

Stylio presenta un design raffinato, diffondendo la luce con eleganza per creare un'atmosfera straordinaria. Con la possibilità di scegliere una lamina posteriore bicolore, questo apparecchio offre una versatilità che si adatta a una vasta gamma di spazi.

**Alloggiamento:** Alluminio pressofuso.

**Riflettore:** Alluminio anodizzato per una riflessione ottimale della luce.

**LED:** Tecnologia LED ad alta efficienza con valutazione L80/B10/F10, garantendo una durata di 50.000 ore e prestazioni affidabili in temperature da -21°C a 56°C.

Stylio offers a refined design, effortlessly casting light to create a stunning atmosphere. Featuring a dual-color back sheet option, this fixture brings added flexibility to suit a wide range of spaces.

**Housing:** Die-cast aluminum.

**Reflector:** Anodized aluminum for optimal light reflection.

**LED:** Energy-efficient LED technology with an L80/B10/F10 rating, providing a 50,000-hour lifespan and reliable performance within temperatures from -21°C to 56°C.

## COMPLIANCE



## CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at [www.flussirari.it](http://www.flussirari.it). These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

