


TALETE

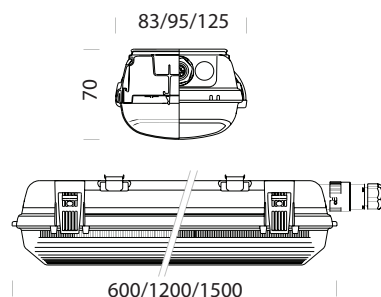

DRIVER OPTIONS

OF On/Off
DL DALI
IV 1/10V dimming

CCT OPTIONS

3000K Warm white
4000K Neutral white
5000K Cool white
6500K Cool white

COD.	POWER	LUMEN	B.ANGLE	SIZE (mm)
30410020	20W	3200 lm	120°	600 x 83 x 70 h
30411040	40W	6400 lm	120°	1200 x 95 x 80 h
30411060	60W	9600 lm	120°	1500 x 125 x 88 h


OPTIONAL

Brightness customization
 Sensor
 Emergency battery
 Power switch
 CCT switch

BEAM ANGLE



LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



TALETE è una luce industriale LED a tenuta stagna, progettata per ambienti industriali e commerciali particolarmente impegnativi. Sviluppato come alternativa ad alte prestazioni ai tradizionali apparecchi lineari e fluorescenti, offre un'illuminazione potente, uniforme ed efficiente dal punto di vista energetico. La struttura impermeabile lo rende ideale per magazzini, centri commerciali, autorimesse, strutture agricole, celle frigorifere e tutti gli ambienti soggetti a umidità, polvere o condizioni gravose. Il sistema LED ad alta efficienza garantisce un elevato flusso luminoso e prestazioni affidabili nel tempo.

Alloggiamento: policarbonato

Diffusore: policarbonato

Riflettore: PMMA in policarbonato, anti-ingiallimento e antiurto, progettato specificamente per applicazioni LED

LED: ad alta efficienza con prestazioni L80/B10/F10, durata di 50.000 ore e funzionamento affidabile con temperature di esercizio da -30°C a 50°C.

TALETE is a robust LED vapor-tight luminaire designed for demanding industrial and commercial environments. Engineered as a high-performance alternative to conventional tube and strip lighting, it delivers powerful, uniform illumination with excellent energy efficiency. Its waterproof construction makes it suitable for applications such as warehouses, shopping centres, parking garages, agricultural facilities, cold storage areas, and other locations exposed to moisture or dust. The advanced LED system provides high luminous output while ensuring long-lasting, reliable performance.

Housing: polycarbonate

Diffuser: polycarbonate

Reflector: PMMA polycarbonate, anti-yellowing and impact-resistant, specifically designed for LED applications

LED: energy-efficient with L80/B10/F10 performance, a 50,000-hour lifespan, and reliable operation in temperatures from -30°C to 50°C.

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

