



TAREK FL1

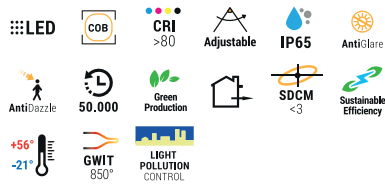


VOLTAGE

AC100-240V 50/60HZ


DRIVER OPTIONS	CCT OPTIONS
OF On/Off	2700K Warm white
DL DALI	3000K Warm white
IV 1/10V dimming	4000K Neutral white
TR Triac	5000K Cool white
DX DMX512	RGBW
OPTIONAL	

FINISHING: Black

BEAM ANGLE

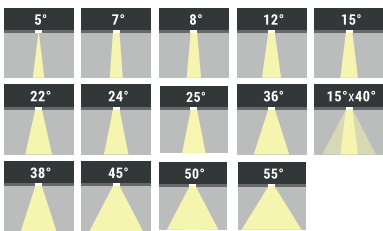

LIGHT DISTRIBUTION



COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



COD.	POWER	LUMEN	L.COLOUR	B.ANGLE	SIZE (mm)
40934004	4W	846 lm	single RGBW	15°/24°/38°/50°	70 x 75 x 102 h
40935012	12W	932 lm	single RGBW	15°/24°/36°/50°	150 x 138 x 180 h
40936021	21W	1329 lm	single RGBW	8°/12°/22°/45°/15°x40°	166 x 150 x 213 h
40937028	28W	1949 lm	single RGBW	8°/12°/22°/45°/15°x40°	195 x 150 x 200 h

I proiettori Tarek sono una soluzione efficiente per l'illuminazione architettonica, da giardino, l'illuminazione d'accento esterna, alberi e segnaletica. Questo articolo è una garanzia in termini di prestazioni lumen, risparmio energetico, durata e stile. La sorgente luminosa è un sistema LED ad alta efficienza e tecnologia avanzata.

Alloggiamento: alluminio pressofuso anticorrosione, resistente alle intemperie

Riflettore: lente ottica

Diffusore: vetro temperato trasparente

LED: risparmio energetico L80/B10/F10 - durata 50.000 h - temperature di lavoro da -21°C a 56°

Tarek lights are an energy-efficient solution for architectural lighting, garden lighting, outdoor accent lighting, tree uplighting, and sign lighting. This item is a warranty in a matter of lumen performances, energy saving, long working lifespan and stylish. The light source is a high efficiency and advanced technology LED system.

Housing: die cast aluminium with anti-corrosion and weatherproof features

Reflector: optical lens

Diffuser: transparent tempered glass

LED: reduce energy consumption with L80/B10/F10 - 50.000 hrs lifetime working under temp (-21°C to 56°C)

Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.


For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.




TAREK FL1 ACCESSORIES


40934A302
Anti glare visor

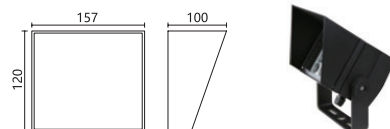


40934A307
Anti glare visor

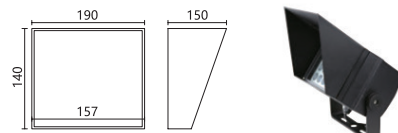

40934A318
Adjustable anti glare visor

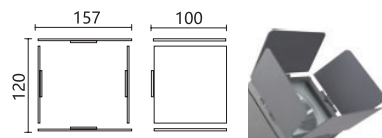

40934A319
Adjustable anti glare visor

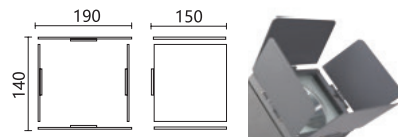

COMPLIANCE



CERTIFICATIONS / POWER SUPPLY COMPLIANCE CHOICES



! Beam angles, optics tailored for specific projects, asymmetric effects, special lenses, opal diffusers, reflector RAL color (if different from white), and the use of anti-glare accessories collectively contribute to variations in total lumen flux compared to the technical sheet data.

Flussirari reserves the right to modify the characteristics of its products and their availability without prior notice. The information provided, including product details, technical data, illustrations, and specifications, is not considered binding. Flussirari accepts no liability for any discrepancies. In our continuous pursuit of product enhancement, we retain the prerogative to make changes to specifications or materials without prior notification, provided such modifications do not compromise the functionality of the product.

For the most current and authoritative specifications, users are advised to refer to the specification sheets available at www.flussirari.it. These documents supersede all other printed or electronic versions and are reflective of the latest updates and revisions.

Compliance may vary in each power supply based on country-specific technical regulations.

